


◎ Suitable for 50mm or less of cable.


#### Basic technical data

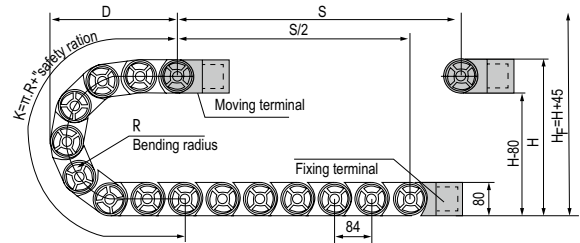

Pitch=84mm, link per meter=12, length of chain=S/2+K, S=stroke.  $K = \pi \cdot R + \text{"safety ration"}$

R	100	125	150	200	250	300	350
H	280	330	380	480	580	680	780
D	224	249	274	324	374	424	474
K	504	588	672	840	1008	1176	1344

Actual mounting height:  $H_f = H + 45\text{mm}$  (load 35kg/m)

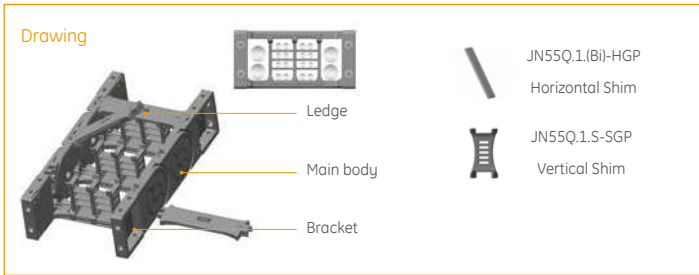

Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Bracket type	Bore diameter $\Phi 1$	(mm) hole distance						Bracket No.
									A	B	C	D	E	F	
JN55Q.1.75W	55	75	80	113	Q.W	100,125 150,200 250,300 350	F-Q	9	35	97	128	30	20	117	JN55Q.1.75W-FJT
JN55Q.1.100W	55	100	80	138	Q.W		F-Q	9	35	122	128	30	20	142	JN55Q.1.100W-FJT
JN55Q.1.125W	55	125	80	163	Q.W		F-Q	9	35	147	128	30	20	167	JN55Q.1.125W-FJT
JN55Q.1.150W	55	150	80	188	Q.W		F-Q	9	35	172	128	30	20	192	JN55Q.1.150W-FJT
JN55Q.1.175W	55	175	80	213	Q.W		F-Q	9	35	197	128	30	20	217	JN55Q.1.175W-FJT
JN55Q.1.200W	55	200	80	238	Q.W		F-Q	9	35	222	128	30	20	242	JN55Q.1.200W-FJT
JN55Q.1.250W	55	250	80	288	Q.W		F-Q	9	35	272	128	30	20	292	JN55Q.1.250W-FJT
JN55Q.1.300W	55	300	80	338	Q.W		F-Q	9	35	322	128	30	20	342	JN55Q.1.300W-FJT

unit: mm

Note: Q,W Bridge type exterior opening, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

#### Fix bracket type and parameters (See table)



F-Q type bracket

#### Order Example

Sample: inner height 55mm, inner width 75mm, radius 100mm, length 12 links/1 meter  
 Chain JN55Q.1.75W R100 1000mm /12 Links (Physical length: ± 2mm)  
 Connector JN55Q.1.75W-FJT 1 (Set)  
 Accessories 1 vertical shim/1 horizontal shim can be mounted in every link



\* Optional: Guide supporting solution See P092