



# J60Q.1.S


Series of J60Q.1.S-Bridge type open of both side

**JFLO**<sup>®</sup>



- ⊙ Suitable for 56mm or less of cable.
- ⊙ The cable chain can be mounted guideway to overloading and long distance running (10-200 meters).

## Basic technical data

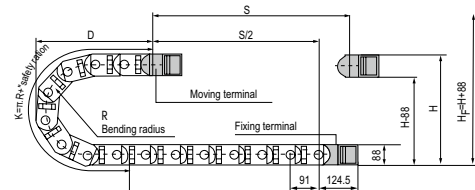


Pitch=91mm, link per meter=11, length of chain= $S/2+K$ ,  $S$ =stroke.  $K=\pi \cdot R$  "safety ration"+1 Pitch

R	135	150	175	200	250	300	450
H	358	388	438	488	588	688	988
D	270	285	310	335	385	435	585
K	637	728	819	910	1001	1183	1638

Actual mounting height:  $H_r=H+88$ mm (load 2.2kg/m)

## Drawing

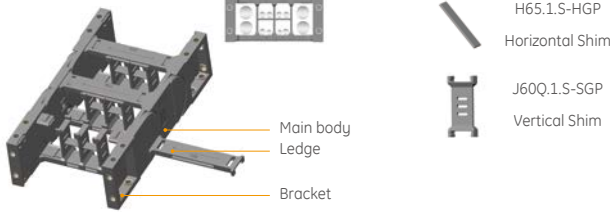


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters									
							Applicable bracket type	Bore diameter $\Phi 1$	(mm hole distance)						Bracket No.	
									A	B	C	D	E	F		
J60Q.1.75S	60	75	88	111	Q.S	135,150,175, 200,250, 300,450	F-Q	9	35	98	125	45	20	115	J60Q.1.75S-FJT	
J60Q.1.100S	60	100	88	136	Q.S		F-Q	9	35	123	125	45	20	140	J60Q.1.100S-FJT	
J60Q.1.125S	60	125	88	161	Q.S		F-Q	9	35	148	125	45	20	165	J60Q.1.125S-FJT	
J60Q.1.150S	60	150	88	186	Q.S		F-Q	9	35	173	125	45	20	190	J60Q.1.150S-FJT	
J60Q.1.175S	60	175	88	211	Q.S		F-Q	9	35	198	125	45	20	215	J60Q.1.175S-FJT	
J60Q.1.200S	60	200	88	236	Q.S		F-Q	9	35	223	125	45	20	240	J60Q.1.200S-FJT	
J60Q.1.250S	60	250	88	286	Q.S		F-Q	9	35	273	125	45	20	290	J60Q.1.250S-FJT	
J60Q.1.300S	60	300	88	336	Q.S		F-Q	9	35	323	125	45	20	340	J60Q.1.300S-FJT	
J60Q.1.350S	60	350	88	386	Q.S		F-Q	9	35	373	125	45	20	390	J60Q.1.350S-FJT	

(unit: mm)

Note: S indicates that the both side open

## Fix bracket type and parameters (See table)

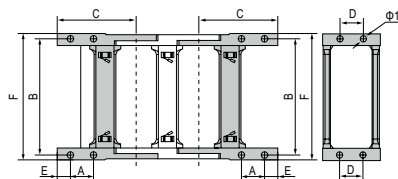

F-Q type bracket

## Order Example

Sample: inner height 60mm, inner width 75mm, radius 135mm, length 11 links/1 meter

Chain J60Q.1.75S R135 1000mm/11 Links

Bracket J60Q.1.75S-XJT 1 Set

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link

Note: Various sizes can be customized according to customer requirements.