


J25Q.2.S


Series of J25Q.2.S-Bridge type open of both side

JFLO[®]

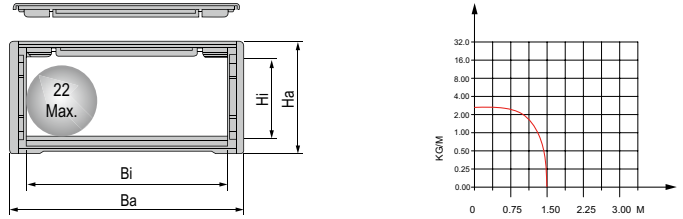

◎ Suitable for 22mm or less of cable.


Basic technical data

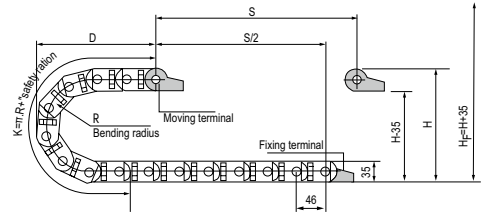

Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. $K = \pi \cdot R + \text{"safety ration"}$

R	40	55	75	100	125	150	175	190	200	250
H	115	145	185	235	285	335	385	415	435	535
D	104	119	139	164	189	214	239	254	264	314
K	230	276	368	414	506	598	644	690	736	920

Actual mounting height: $H_f = H + 35\text{mm}$ (load 1.0kg/m)

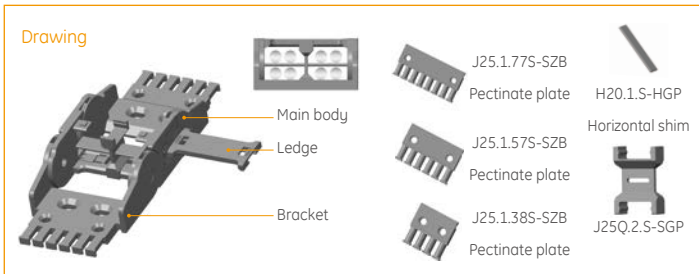


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\Phi 1$	mm hole distance						Bracket No.
									A	B	C	D	E	F	
J25Q.2.25S	25	25	35	40	Q.S	40,55,75,100,125,150,175,190,200,250	X ₂	6.2*9L	14	41	12	40	J25Q.2.25S-XJT		
							F-Q	6	50	33	10	60	J25Q.2.25S-XJT		
J25Q.2.38S	25	38	35	53	Q.S		X ₂	6*10L	25	41	12	53	J25Q.2.38S-XJT		
							F-Q	6	63	33	10	73	J25Q.2.38S-FJT		
J25Q.2.50S	25	50	35	65	Q.S		X ₂	6*10L	37	41	12	65	J25Q.2.60S-XJT		
							F-Q	6	75	33	10	85	J25Q.2.50S-FJT		
J25Q.2.57S	25	57	35	72	Q.S		X ₂	6*10L	45	41	12	72	J25Q.2.57S-XJT		
							F-Q	6	82	33	10	92	J25Q.2.57S-FJT		
J25Q.2.77S	25	77	35	92	Q.S		X ₅	6*12L	57	41	12	92	J25Q.2.77S-XJT		
							F-Q	6	102	33	10	112	J25Q.2.77S-FJT		


unit: mm

Note: S indicates that the both side open


Fix bracket type and parameters (See table)



X₂ type bracket



X₃ type bracket

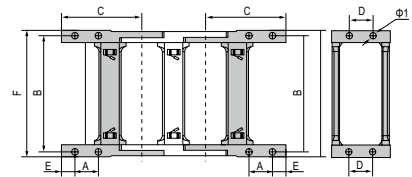

F-Q type bracket

Order Example

Sample: inner height 25mm, inner width 25mm, radius 55mm, length 22 links/1 meter

Chain J25Q.2.25S R55 1000mm /22 Links

Bracket J25Q.2.25S-XJT 1 Set

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link

Note: Various sizes can be customized according to customer requirements.