



# J35Q.3.W


Series of J35Q.3.W(Connection)-Bridge type exterior opening

**JFLO**<sup>®</sup>



◎ Suitable for 32mm or less of cable.

## Basic technical data

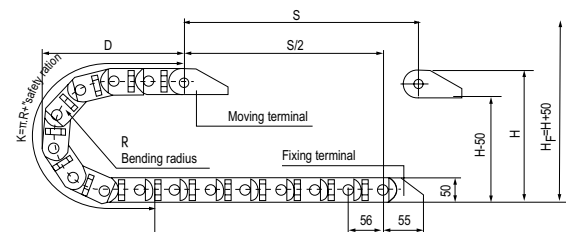


Pitch=56mm, link per meter=18, length of chain= $S/2+K$ ,  $S$ =stroke.  $K=\pi \cdot R$ + "safety ration"

R	75	150
H	200	350
D	156	231
K	392	616

Actual mounting height:  $H_f = H + 50$ mm (load 1.0kg/m)

## Drawing

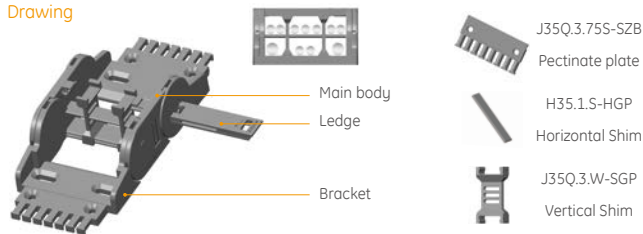


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\Phi 1$	mm hole distance						Bracket No.
									A	B	C	D	E	F	
J35Q.3.75W	35	75	50	92	Q.W	75,150	X <sub>2</sub>	6.2*19L		55	55		17	93	J35Q.3.75W-XJT

unit: mm

Note: W Bridge type exterior opening

## Fix bracket type and parameters (See table)



X<sub>2</sub> type bracket

## Order Example

Sample: inner height 35mm, inner width 75mm, radius 75mm, length 18 links/1 meter

Chain J35Q.3.75S R75 1000mm /18 Links

Bracket J35Q.3.75S -XJT 1 Set

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link

Note: Various sizes can be customized according to customer requirements.