



J45Q.1.S


Series of J45Q.1.S-Bridge type open of both side

JFLO[®]



© Suitable for 41mm or less of cable.

Basic technical data

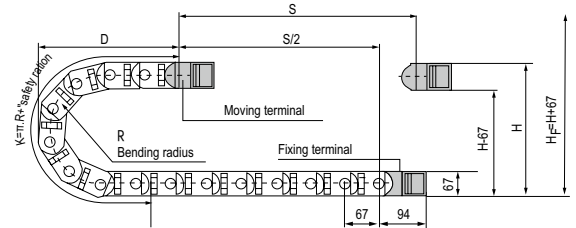


Pitch=67mm, link per meter=15, length of chain=S/2+K, S=stroke. $K = \pi \cdot R \cdot \text{"safety ration"}$

	R	100	125	150	175	200	225	250	300
H	267	317	367	417	467	517	567	667	
D	201	226	251	275	301	326	351	401	
K	469	536	670	737	804	871	938	1139	

Actual mounting height: $H_p = H + 67 \text{mm}$ (load 2.2kg/m)

Drawing

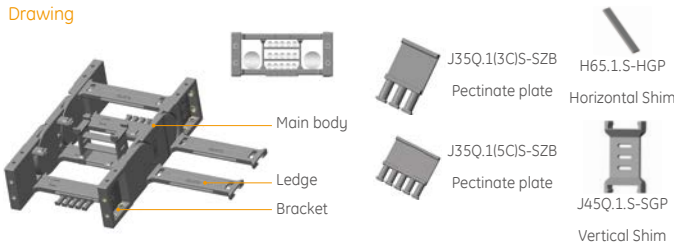


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters						Bracket No.		
							mm hole distance								
							Applicable bracket type	Bore diameter $\Phi 1$	A	B	C	D	E	F	
J45Q.1.50S	45	50	67	74	Q.S	100,125,150, 175,200,225, 250,300	F-Q	6	24	65	94	26	15	80	J45Q.1.50S-FJT
J45Q.1.60S	45	60	67	84	Q.S		F-Q	6	24	75	94	26	15	90	J45Q.1.60S-FJT
J45Q.1.75S	45	75	67	99	Q.S		F-Q	6	24	90	94	26	15	105	J45Q.1.75S-FJT
J45Q.1.90S	45	90	67	114	Q.S		F-Q	6	24	105	94	26	15	120	J45Q.1.90S-FJT
J45Q.1.100S	45	100	67	124	Q.S		F-Q	6	24	115	94	26	15	130	J45Q.1.100S-FJT
J45Q.1.117S	45	117	67	141	Q.S		F-Q	6	24	132	94	26	15	147	J45Q.1.117S-FJT
J45Q.1.125S	45	125	67	149	Q.S		F-Q	6	24	140	94	26	15	155	J45Q.1.125S-FJT
J45Q.1.130S	45	130	67	154	Q.S		F-Q	6	24	145	94	26	15	160	J45Q.1.130S-FJT
J45Q.1.150S	45	150	67	174	Q.S		F-Q	6	24	165	94	26	15	180	J45Q.1.150S-FJT
J45Q.1.154S	45	154	67	178	Q.S		F-Q	6	24	169	94	26	15	184	J45Q.1.154S-FJT
J45Q.1.175S	45	175	67	199	Q.S		F-Q	6	24	190	94	26	15	205	J45Q.1.175S-FJT
J45Q.1.200S	45	200	67	224	Q.S		F-Q	6	24	215	94	26	15	230	J45Q.1.200S-FJT
J45Q.1.250S	45	250	67	274	Q.S		F-Q	6	24	265	94	26	15	280	J45Q.1.250S-FJT
J45Q.1.300S	45	300	67	324	Q.S		F-Q	6	24	315	94	26	15	330	J45Q.1.300S-FJT

unit: mm

Note: S indicates that the both side open

Fix bracket type and parameters (See table)

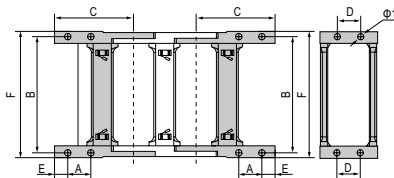

F-Q type bracket

Order Example

Sample: inner height 45mm, inner width 50mm, radius 100mm, length 15 links/1 meter

Chain J45Q.1.50S R100 1000mm /15 Links

Bracket J45Q.1.50S -XJT 1 Set

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link

Note: Various sizes can be customized according to customer requirements.