


◎ Suitable for 25mm or less of cable.


Basic technical data

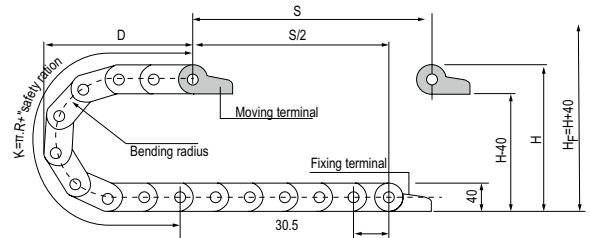

Pitch=30.5mm, link per meter=33, length of chain=S/2+K, S=stroke. $K = \pi \cdot R + \text{"safety ration"}$

R	40	60	75	100	125
H	116	156	186	236	286
D	89	109	124	149	174
K	214	275	305	397	458

Actual mounting height: $H_f = H + 40\text{mm}$ (load 0.3kg/m)

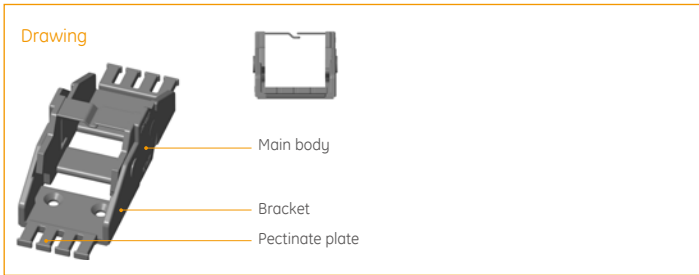

Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters									
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						Bracket No.	
A	B	C	D	E	F											
JE32Q.1.36F	30.5	36	40	48		40.60.75 100.125	X ₂		5.2		25	38		21	48.5	JE32Q.1.36F-XJT*

(unit: mm)

Note: F indicates that the Convenient type

Fix bracket type and parameters (See table)



* Optional: Bracket with Pectinate plate Example: JE32Q.1.36F-XJTS



* Optional: Guide supporting solution See P092

Order Example

Sample: inner height 30.5mm, inner width 36mm, radius 40mm, length 33 links/1 meter

Chain JE32Q.1.36F R40 1000mm /33 Links

Bracket JE32Q.1.36F-XJT 1 (Set)

Accessories

Note: Various sizes can be customized according to customer requirements.