




# JEZ25Q.2.S

Series of JEZ25Q.2.S-Bridge type open of both side

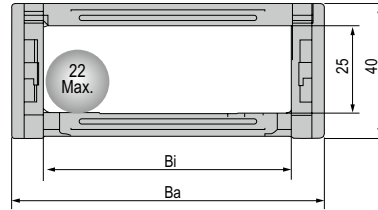

◎ Suitable for 22mm or less of cable.


## Basic technical data

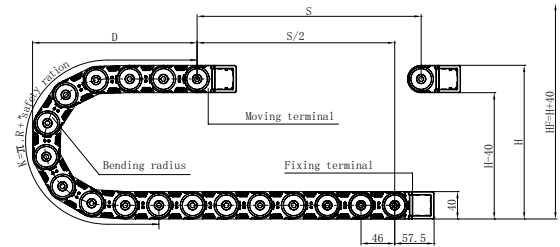

Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke.  $K = \pi \cdot R \cdot \text{''safety ration''}$

R	55	75	100	125	150
H	150	190	240	290	340
D	121	141	166	191	216
K	276	368	414	506	598

Actual mounting height:  $H_f = H + 40\text{mm}$  (load 3kg/m)

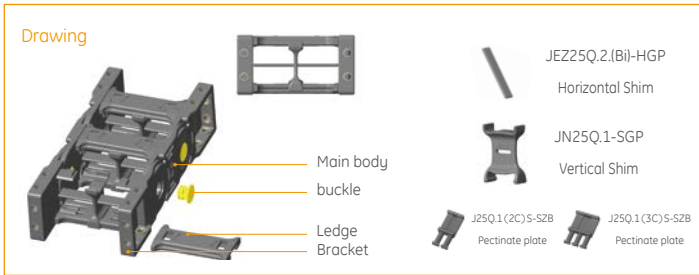


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance					Bracket No.	
									A	B	C	D	E		F
JEZ25Q.2.25S	25	25	40	43.2	Q.S	55.75. 100.125.150	F-Q	4.5	16	37	57.5	16	9.5	46.5	JEZ25Q.2.25S-FJT
JEZ25Q.2.38S	25	38	40	56.2	Q.S		F-Q	4.5	16	50	57.5	16	9.5	59.5	JEZ25Q.2.38S-FJT
JEZ25Q.2.50S	25	50	40	68.2	Q.S		F-Q	4.5	16	62	57.5	16	9.5	71.5	JEZ25Q.2.50S-FJT
JEZ25Q.2.57S	25	57	40	75.2	Q.S		F-Q	4.5	16	69	57.5	16	9.5	78.5	JEZ25Q.2.57S-FJT
JEZ25Q.2.60S	25	60	40	78.2	Q.S		F-Q	4.5	16	72	57.5	16	9.5	81.5	JEZ25Q.2.60S-FJT
JEZ25Q.2.75S	25	75	40	93.2	Q.S		F-Q	4.5	16	87	57.5	16	9.5	96.5	JEZ25Q.2.75S-FJT
JEZ25Q.2.77S	25	77	40	95.2	Q.S		F-Q	4.5	16	89	57.5	16	9.5	98.5	JEZ25Q.2.77S-FJT
JEZ25Q.2.100S	25	100	40	118.2	Q.S		F-Q	4.5	16	112	57.5	16	9.5	121.5	JEZ25Q.2.100S-FJT
JEZ25Q.2.103S	25	103	40	121.2	Q.S		F-Q	4.5	16	115	57.5	16	9.5	124.5	JEZ25Q.2.103S-FJT
JEZ25Q.2.125S	25	125	40	143.2	Q.S		F-Q	4.5	16	137	57.5	16	9.5	146.5	JEZ25Q.2.125S-FJT


(unit: mm)

Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

## Fix bracket type and parameters (See table)

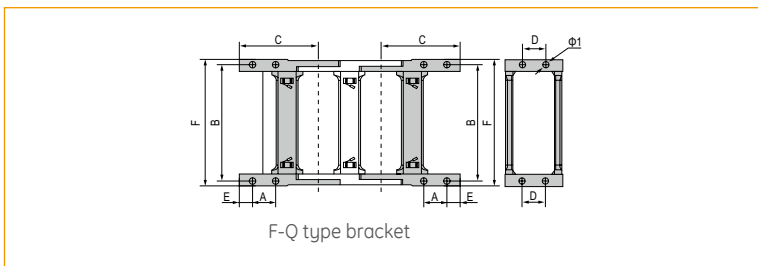

F-Q type bracket

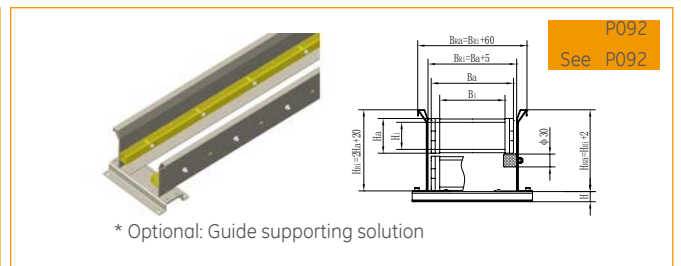

\* Optional: Guide supporting solution

## Order Example

Sample: inner height 25mm, inner width 25mm, radius 55mm, length 22 links/1 meter

Chain JEZ25Q.2.25S R55 1000mm /22 Links (Physical length:  $\pm 2\text{mm}$ )

Bracket JEZ25Q.2.25S-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link