


◎ Suitable for 30mm or less of cable.


Basic technical data

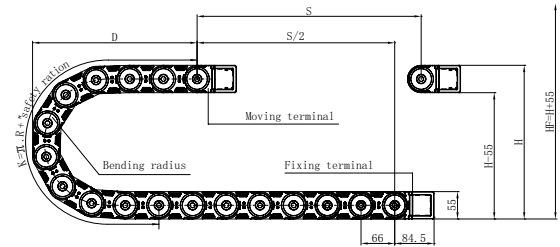

Pitch=66mm, link per meter=15, length of chain=S/2+K, S=stroke. K=π.R+ "safety ration"

	R	100	125	150	175	200	300
H	255	305	355	405	455	655	
D	194	219	244	269	294	394	
K	462	528	660	726	792	1122	

Actual mounting height: $H_f = H + 55\text{mm}$ (load 15kg/m)


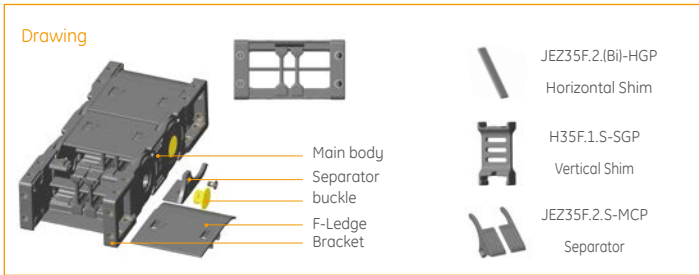


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters						Bracket No.		
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						
									A	B	C	D			E
JEZ35F.2.50S	35	50	55	73.2	F.S	100.125. 150.175. 200.300	F-F	6	24	66	84.5	26	16	78	JEZ35F.2.50S-FJT
JEZ35F.2.60S	35	60	55	83.2	F.S		F-F	6	24	76	84.5	26	16	88	JEZ35F.2.60S-FJT
JEZ35F.2.75S	35	75	55	98.2	F.S		F-F	6	24	91	84.5	26	16	103	JEZ35F.2.75S-FJT
JEZ35F.2.100S	35	100	55	123.2	F.S		F-F	6	24	116	84.5	26	16	128	JEZ35F.2.100S-FJT
JEZ35F.2.125S	35	125	55	148.2	F.S		F-F	6	24	141	84.5	26	16	153	JEZ35F.2.125S-FJT
JEZ35F.2.130S	35	130	55	153.2	F.S		F-F	6	24	146	84.5	26	16	158	JEZ35F.2.130S-FJT
JEZ35F.2.150S	35	150	55	173.2	F.S		F-F	6	24	166	84.5	26	16	178	JEZ35F.2.150S-FJT

(unit): mm

Note: F.S Enclosed open of both side, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

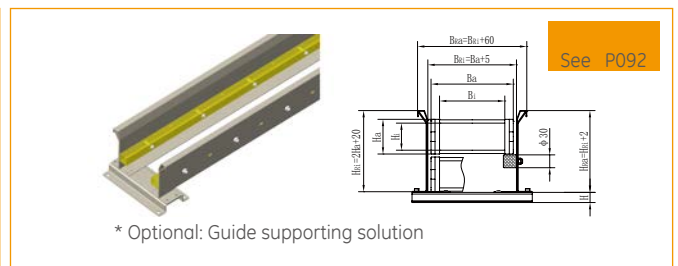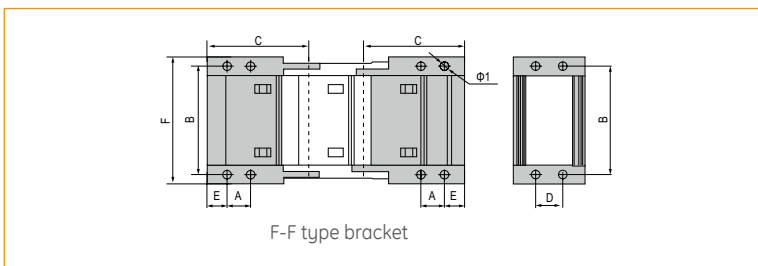

* Optional: Guide supporting solution

Order Example

Sample: inner height 35mm, inner width 50mm, radius 100mm, length 15 links/1 meter

Chain JEZ35F.2.50S R100 1000mm /15 Links (Physical length: ± 2mm)

Bracket JEZ35F.2.50S-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link)