


◎ Suitable for 22mm or less of cable.


Basic technical data

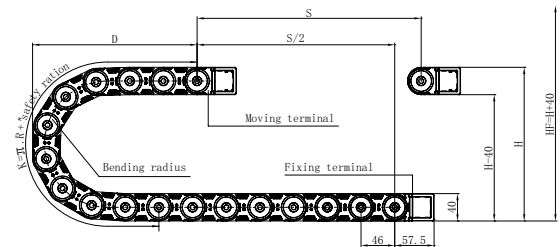

Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+ "safety ration"

R	75	100	125	150
H	190	240	290	340
D	141	166	191	216
K	368	414	506	598

Actual mounting height: $H_f = H + 40\text{mm}$ (load 3kg/m)


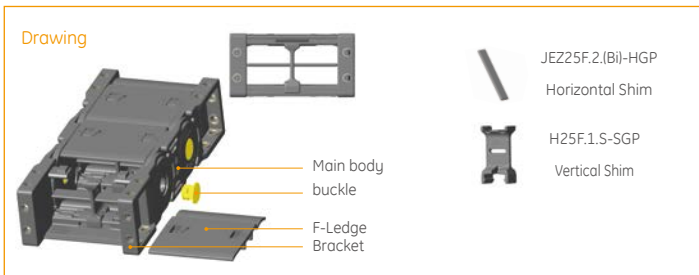


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters						Bracket No.		
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						
									A	B	C	D		E	F
JEZ25F.2.38S	25	38	40	56.2	F.S	75.100. 125.150	F-F	4.5	16	50	57.5	16	9.5	59.5	JEZ25F.2.38S-FJT
JEZ25F.2.50S	25	50	40	68.2	F.S		F-F	4.5	16	62	57.5	16	9.5	71.5	JEZ25F.2.50S-FJT
JEZ25F.2.57S	25	57	40	75.2	F.S		F-F	4.5	16	69	57.5	16	9.5	78.5	JEZ25F.2.57S-FJT
JEZ25F.2.60S	25	60	40	78.2	F.S		F-F	4.5	16	72	57.5	16	9.5	81.5	JEZ25F.2.60S-FJT
JEZ25F.2.75S	25	75	40	93.2	F.S		F-F	4.5	16	87	57.5	16	9.5	96.5	JEZ25F.2.75S-FJT
JEZ25F.2.100S	25	100	40	118.2	F.S		F-F	4.5	16	112	57.5	16	9.5	121.5	JEZ25F.2.100S-FJT

(unit): mm

Note: F.S Enclosed open of both side, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

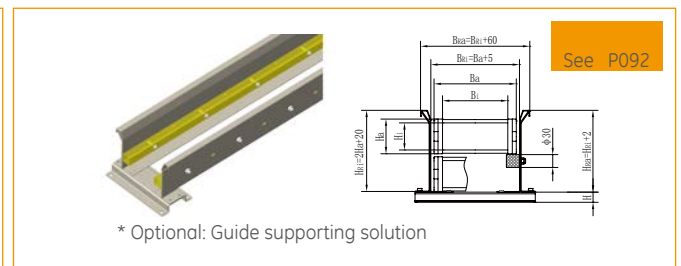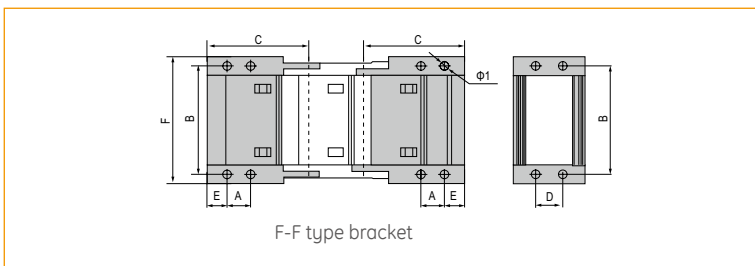

* Optional: Guide supporting solution

Order Example

Sample: inner height 25mm, inner width 38mm, radius 75mm, length 22 links/1 meter

Chain JEZ25F.2.38S R75 1000mm /22 Links (Physical length: $\pm 2\text{mm}$)

Bracket JEZ25F.2.38S-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link