


◎ Suitable for 27mm or less of cable.


Basic technical data

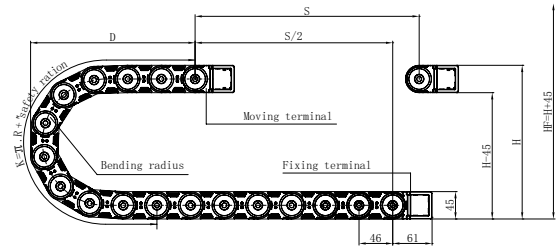

Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+ "safety ration"

R	75	100	125	150
H	195	245	295	345
D	144	169	194	219
K	368	414	506	598

Actual mounting height: $H_f = H + 45\text{mm}$ (load 4kg/m)


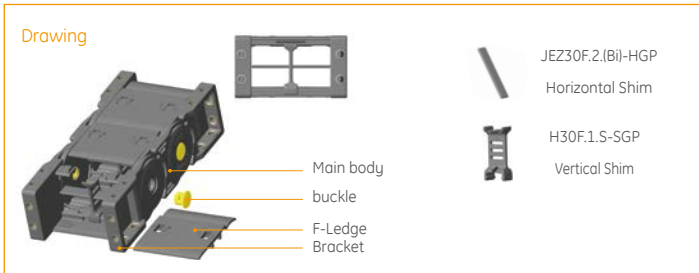


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters						Bracket No.		
							Applicable bracket type	Bore diameter $\phi 1$	(mm) hole distance						
									A	B	C	D			E
JEZ30F.2.38S	30	38	45	57.2	F.S	75.100. 125.150	F-F	5.5	18	52	61	18	11	62	JEZ30F.2.38S-FJT
JEZ30F.2.50S	30	50	45	69.2	F.S		F-F	5.5	18	64	61	18	11	74	JEZ30F.2.50S-FJT
JEZ30F.2.57S	30	57	45	76.2	F.S		F-F	5.5	18	71	61	18	11	81	JEZ30F.2.57S-FJT
JEZ30F.2.60S	30	60	45	79.2	F.S		F-F	5.5	18	74	61	18	11	84	JEZ30F.2.60S-FJT
JEZ30F.2.75S	30	75	45	94.2	F.S		F-F	5.5	18	89	61	18	11	99	JEZ30F.2.75S-FJT
JEZ30F.2.100S	30	100	45	119.2	F.S		F-F	5.5	18	114	61	18	11	124	JEZ30F.2.100S-FJT

(unit): mm

Note: F.S Enclosed open of both side, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

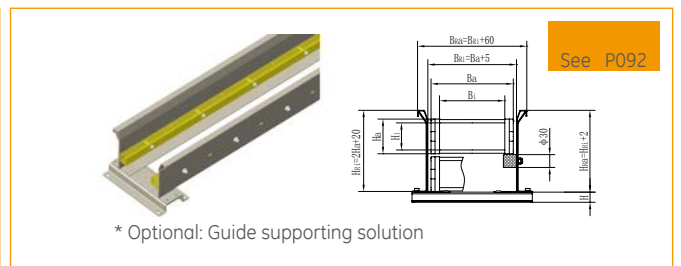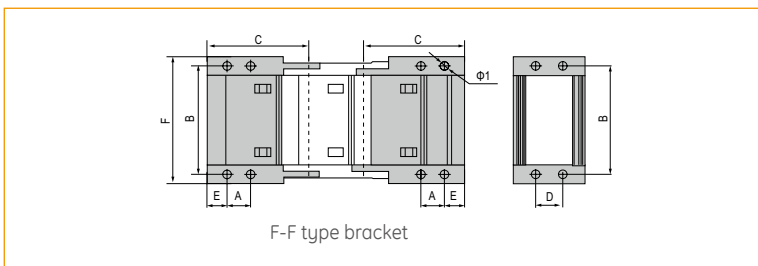

* Optional: Guide supporting solution

Order Example

Sample: inner height 30mm, inner width 38mm, radius 75mm, length 22 links/1 meter

Chain JEZ30F.2.38S R75 1000mm /22 Links (Physical length: $\pm 2\text{mm}$)

Bracket JEZ30F.2.38S-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link