




JEZ45Q.2.S

Series of JEZ45Q.2.S-Bridge type open of both side

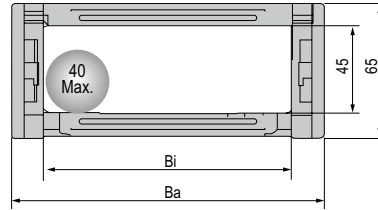

⊗ Suitable for 40mm or less of cable.


Basic technical data

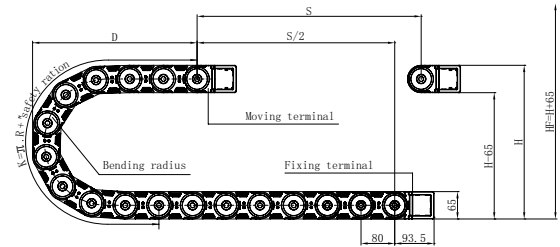

Pitch=80mm,link per meter=13,length of chain=S/2+K,S=stroke.K=π.R+ "safety ration"

	R	75	100	125	150	200	250	300
H	215	265	315	365	465	565	665	
D	188	213	238	263	313	363	413	
K	400	480	560	640	800	960	1120	

Actual mounting height: $H_f = H + 65\text{mm}$ (load 28kg/m)


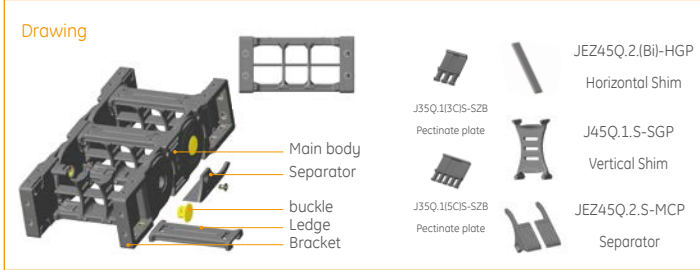


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\phi 1$	(mm) hole distance					Bracket No.	
									A	B	C	D	E		F
JEZ45Q.2.50S	45	50	65	76.2	Q.S	75,100,125,150,200,250,300	F-Q	6	23.5	68	93.5	25.5	16	83.5	JEZ45Q.2.50S-FJT
JEZ45Q.2.60S	45	60	65	86.2	Q.S		F-Q	6	23.5	78	93.5	25.5	16	93.5	JEZ45Q.2.60S-FJT
JEZ45Q.2.75S	45	75	65	101.2	Q.S		F-Q	6	23.5	93	93.5	25.5	16	108.5	JEZ45Q.2.75S-FJT
JEZ45Q.2.90S	45	90	65	116.2	Q.S		F-Q	6	23.5	108	93.5	25.5	16	123.5	JEZ45Q.2.90S-FJT
JEZ45Q.2.100S	45	100	65	126.2	Q.S		F-Q	6	23.5	118	93.5	25.5	16	133.5	JEZ45Q.2.100S-FJT
JEZ45Q.2.117S	45	117	65	143.2	Q.S		F-Q	6	23.5	135	93.5	25.5	16	150.5	JEZ45Q.2.117S-FJT
JEZ45Q.2.125S	45	125	65	151.2	Q.S		F-Q	6	23.5	143	93.5	25.5	16	158.5	JEZ45Q.2.125S-FJT
JEZ45Q.2.130S	45	130	65	156.2	Q.S		F-Q	6	23.5	148	93.5	25.5	16	163.5	JEZ45Q.2.130S-FJT
JEZ45Q.2.150S	45	150	65	176.2	Q.S		F-Q	6	23.5	168	93.5	25.5	16	183.5	JEZ45Q.2.150S-FJT
JEZ45Q.2.154S	45	154	65	180.2	Q.S		F-Q	6	23.5	172	93.5	25.5	16	187.5	JEZ45Q.2.154S-FJT
JEZ45Q.2.175S	45	175	65	201.2	Q.S		F-Q	6	23.5	193	93.5	25.5	16	208.5	JEZ45Q.2.175S-FJT
JEZ45Q.2.200S	45	200	65	226.2	Q.S		F-Q	6	23.5	218	93.5	25.5	16	233.5	JEZ45Q.2.200S-FJT
JEZ45Q.2.250S	45	250	65	276.2	Q.S		F-Q	6	23.5	269	93.5	25.5	16	283.5	JEZ45Q.2.250S-FJT
JEZ45Q.2.300S	45	300	65	326.2	Q.S		F-Q	6	23.5	318	93.5	25.5	16	333.5	JEZ45Q.2.300S-FJT

(unit): mm

Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

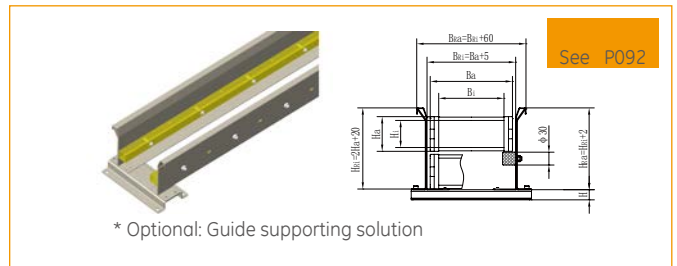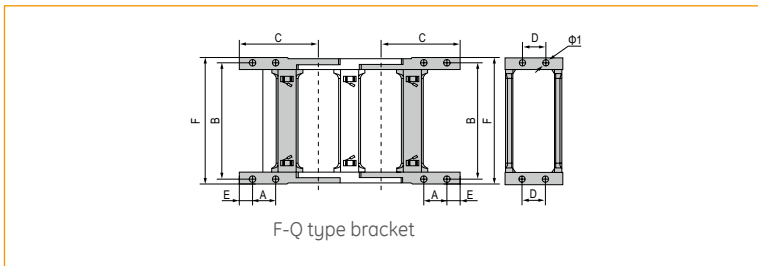

* Optional: Guide supporting solution

Order Example

Sample: inner height 45mm, inner width 50mm, radius 75mm, length 13 links/1 meter
 Chain JEZ45Q.2.50S R75 1000mm/13 Links (Physical length: ± 2mm)
 Bracket JEZ45Q.2.50S-FJT 1 (Set)
 Accessories 1 vertical shim/1 horizontal shim can be mounted in every link