




JEZ65Q.2.S

Series of JEZ65Q.2.S-Bridge type open of both side

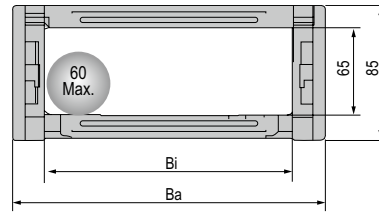

◎ Suitable for 60mm or less of cable.


Basic technical data

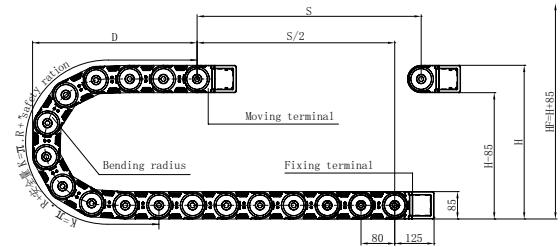

Pitch=80mm, link per meter=13, length of chain=S/2+K, S=stroke. $K = \pi \cdot R + \text{"safety ration"}$

R	125	150	200	250	300	400	500
H	335	385	485	585	685	885	1085
D	248	273	323	373	423	523	623
K	560	640	800	960	1120	1440	1760

Actual mounting height: $H_f = H + 85\text{mm}$ (load 3kg/m)


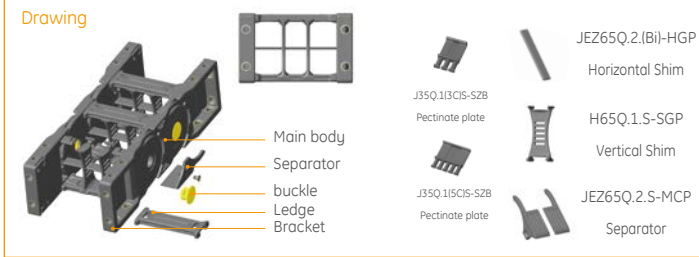


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters						Bracket No.		
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						
									A	B	C	D		E	F
JEZ65Q.2.50S	65	50	85	81.6	Q.S	125. 150. 200 500	F-Q	9	35	72	125	45	20	90	JEZ65Q.2.50S-FJT
JEZ65Q.2.60S	65	60	85	91.6	Q.S		F-Q	9	35	82	125	45	20	100	JEZ65Q.2.60S-FJT
JEZ65Q.2.75S	65	75	85	106.6	Q.S		F-Q	9	35	97	125	45	20	115	JEZ65Q.2.75S-FJT
JEZ65Q.2.90S	65	90	85	121.6	Q.S		F-Q	9	35	112	125	45	20	130	JEZ65Q.2.90S-FJT
JEZ65Q.2.100S	65	100	85	131.6	Q.S		F-Q	9	35	122	125	45	20	140	JEZ65Q.2.100S-FJT
JEZ65Q.2.117S	65	117	85	148.6	Q.S		F-Q	9	35	139	125	45	20	157	JEZ65Q.2.117S-FJT
JEZ65Q.2.125S	65	125	85	156.6	Q.S		F-Q	9	35	147	125	45	20	165	JEZ65Q.2.125S-FJT
JEZ65Q.2.130S	65	130	85	161.6	Q.S		F-Q	9	35	152	125	45	20	170	JEZ65Q.2.130S-FJT
JEZ65Q.2.150S	65	150	85	181.6	Q.S		F-Q	9	35	172	125	45	20	190	JEZ65Q.2.150S-FJT
JEZ65Q.2.154S	65	154	85	185.6	Q.S		F-Q	9	35	176	125	45	20	194	JEZ65Q.2.154S-FJT
JEZ65Q.2.175S	65	175	85	206.6	Q.S		F-Q	9	35	197	125	45	20	215	JEZ65Q.2.175S-FJT
JEZ65Q.2.200S	65	200	85	231.6	Q.S		F-Q	9	35	222	125	45	20	240	JEZ65Q.2.200S-FJT
JEZ65Q.2.250S	65	250	85	281.6	Q.S		F-Q	9	35	272	125	45	20	290	JEZ65Q.2.250S-FJT
JEZ65Q.2.300S	65	300	85	331.6	Q.S		F-Q	9	35	322	125	45	20	340	JEZ65Q.2.300S-FJT

(unit): mm

Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

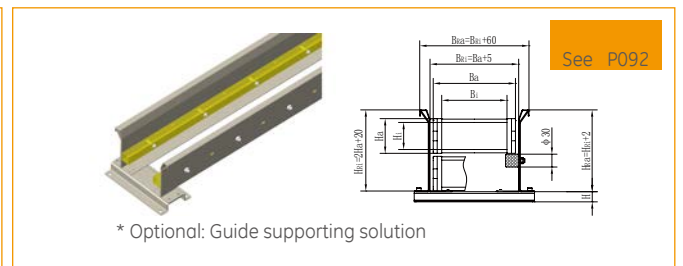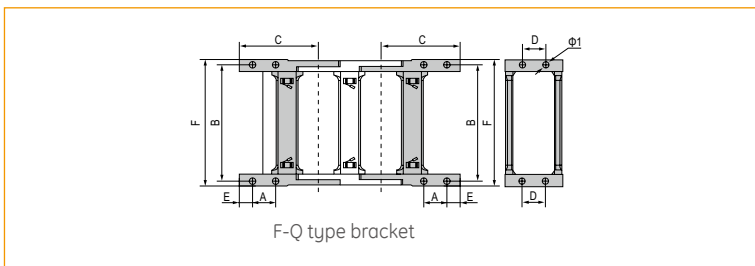

* Optional: Guide supporting solution

Order Example

Sample: inner height 65mm, inner width 50mm, radius 125mm, length 13 links/1 meter
 Chain JEZ65Q.2.50S R125 1000mm/13 Links (Physical length: ± 2mm)
 Bracket JEZ65Q.2.50S-FJT 1 (Set)
 Accessories 1 vertical shim/1 horizontal shim can be mounted in every link