


◎ Suitable for 72mm or less of cable.


### Basic technical data

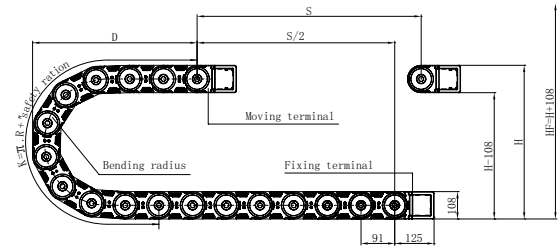

Pitch=91mm, link per meter=11, length of chain=S/2+K, S=stroke. K=π.R+ "safety ration"

R	150	200	250	300	350	400	500	600
H	408	508	608	708	808	908	1108	1308
D	295	345	395	445	495	545	645	745
K	728	819	1001	1183	1365	1456	1820	2093

Actual mounting height:  $H_f = H + 108\text{mm}$  (load 3kg/m)


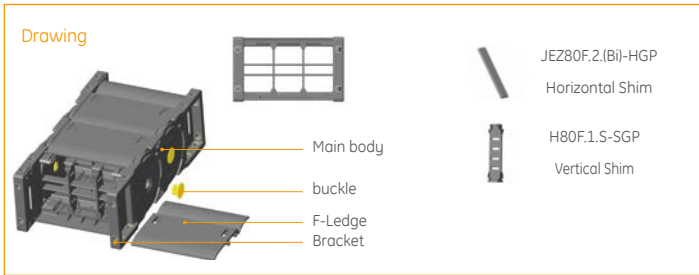


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters									
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						Bracket No.	
									A	B	C	D	E	F		
JEZ80F.2.100S	80	100	108	131	F.S	150.200.250 300.350.400 500.600	F-F	9	35	120	125	66	20	137	JEZ80F.2.100S-FJT	
JEZ80F.2.125S	80	125	108	156	F.S		F-F	9	35	145	125	66	20	172	JEZ80F.2.125S-FJT	
JEZ80F.2.150S	80	150	108	181	F.S		F-F	9	35	170	125	66	20	187	JEZ80F.2.150S-FJT	
JEZ80F.2.200S	80	200	108	231	F.S		F-F	9	35	220	125	66	20	237	JEZ80F.2.200S-FJT	
JEZ80F.2.250S	80	250	108	281	F.S		F-F	9	35	270	125	66	20	287	JEZ80F.2.250S-FJT	
JEZ80F.2.300S	80	300	108	331	F.S		F-F	9	35	320	125	66	20	337	JEZ80F.2.300S-FJT	
JEZ80F.2.350S	80	350	108	381	F.S		F-F	9	35	370	125	66	20	387	JEZ80F.2.350S-FJT	

(unit): mm

Note: F.S Enclosed open of both side, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

### Fix bracket type and parameters (See table)

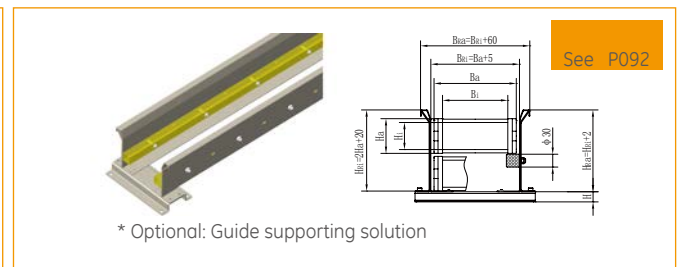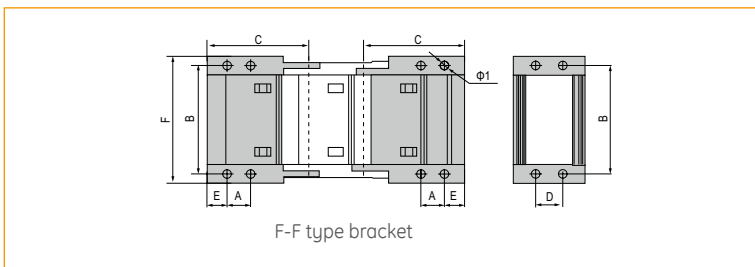

\* Optional: Guide supporting solution

### Order Example

Sample: inner height 80mm, inner width 150mm, radius 150mm, length 11 links/1 meter

Chain JEZ80F.2.150S R150 1000mm /11 Links (Physical length: ± 2mm)

Bracket JEZ80F.2.150S-FJT 1 (Set)

Accessories vertical shim/1 horizontal shim can be mounted in every link