


◎ Suitable for 9mm or less of cable.


#### Basic technical data

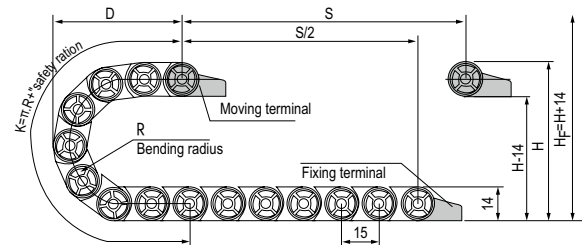

Pitch=15mm,link per meter=67,length of chain=S/2+K,S=stroke.K= π .R+''safety ration''

R	18	28	38
H	50	70	90
D	40	50	60
K	90	120	150

Actual mounting height:H<sub>f</sub>=H+14mm(load 0.5kg/0.5m)

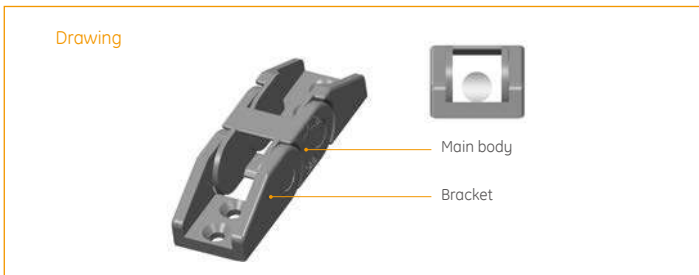


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters							
							Applicable bracket type	Bore diameter φ1	(mm) hole distance					Bracket No.
									A	B	C	D	E	
JN10Q.1.10B	10	10	14	18	Q.B	18,28,38	X <sub>1</sub>	3.2	8	22	4	18	JN10Q.1.10B-XJT	
JN10Q.1.15B	10	15	14	23	Q.B		X <sub>1</sub>	3.2	8	22	4	23	JN10Q.1.15B-XJT	
JN10Q.1.20B	10	20	14	28	Q.B		X <sub>1</sub>	3.2	8	22	4	28	JN10Q.1.20B-XJT	

unit: mm

Note: Q.B Bridge type non-opening,X: oblique bracket,Different serial number indicates the difference rank type of fixing holes

#### Fix bracket type and parameters (See table)

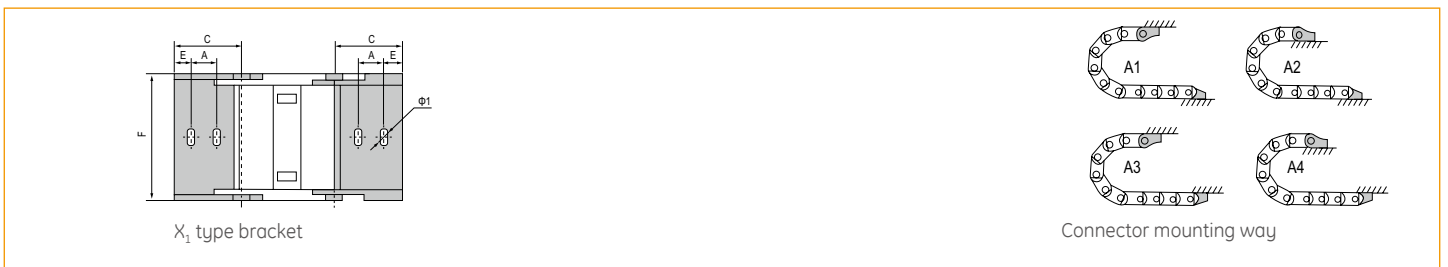

#### Order Example

Sample: inner height 10mm, inner width 10mm, radius 18mm, length 33 links/0.5 meter

Chain JN10Q.1.10B R18 500mm /33 Links (Physical length:± 2mm)

Bracket JN10Q.1.10B-XJT 1 (Set)

Accessories