


◎ Suitable for 13mm or less of cable.

Basic technical data

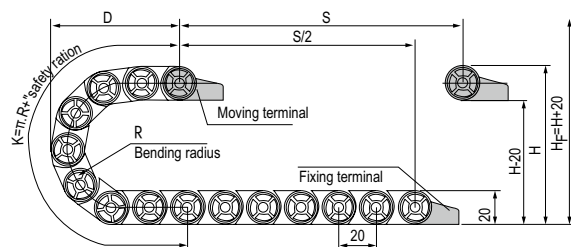


Pitch=20mm,link per meter=50,length of chain=S/2+K,S=stroke.K=π.R+ "safety ration"

R	28	38	48
H	76	96	116
D	58	68	28
K	140	160	200

Actual mounting height:H_f=H+20mm(load 0.3kg/m)

Drawing

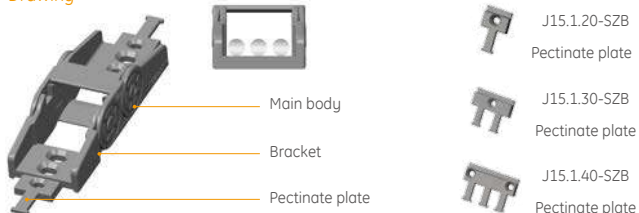


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter φ1	(mm) hole distance						Bracket No.
									A	B	C	D	E	F	
JN15Q.1.15B	15	15	20	24	Q.B	28,38,48	X ₁	3.2	8	30	7	24	JN15Q.1.15B-XJT		
JN15Q.1.20B	15	20	20	28	Q.B		X ₁	4*6L	8	30	5	28	JN15Q.1.20B-XJT		
JN15Q.1.30B	15	30	20	38	Q.B		X ₃	4*6L	8	22	30	5	38	JN15Q.1.30B-XJT	
JN15Q.1.40B	15	40	20	48	Q.B		X ₃	3.2*4.2L	8	32	30	7	48	JN15Q.1.40B-XJT	

unit: mm

Note: Q,B Bridge type non-opening,X: oblique bracket,Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

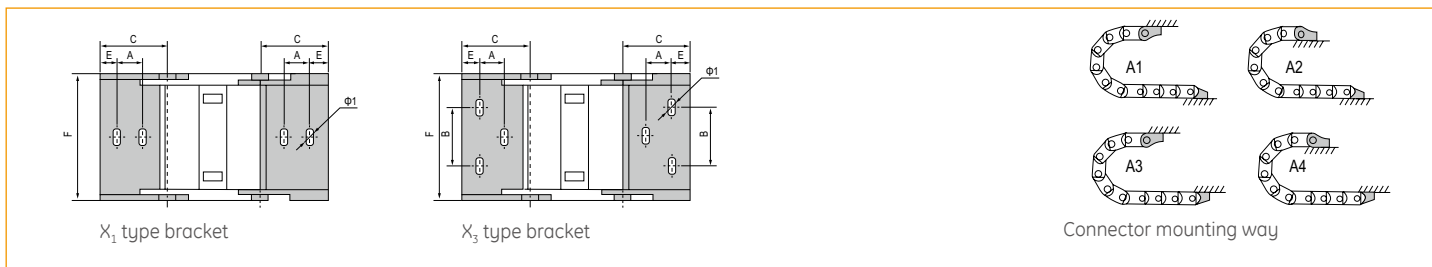

Order Example

Sample: inner height 15mm, inner width 15mm, radius 28mm, length 25 links/0.5 meter

Chain JN15Q.1.20B R28 500mm /25 Links (Physical length: ± 2mm)

Bracket JN15Q.1.20B-XJT 1 (Set)

Accessories