




JN18Q.1.W

Series of JN18Q.1.W-Bridge type exterior opening



◎ Suitable for 16mm or less of cable.

Basic technical data

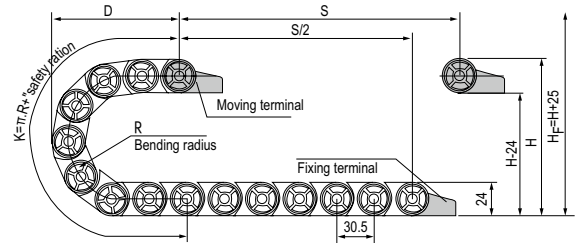


Pitch=30.5mm, link per meter=33, length of chain=S/2+K, S=stroke. $K = \pi \cdot R + \text{“safety ration”}$

R	28	38	48	75
H	80	100	120	174
D	71	81	91	118
K	152	183	214	305

Actual mounting height: $H_f = H + 25\text{mm}$ (load 0.5kg/m)

Drawing

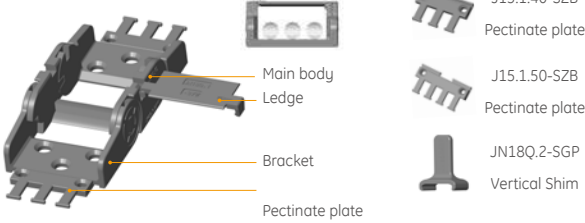


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\phi 1$	(mm) hole distance						Bracket No.
									A	B	C	D	E	F	
JN18Q.1.18W	18	18	24	30	QW	28,38,48,75	X_2	5.2	9.5	33	15	30	JN18Q.1.18W-XJT		
JN18Q.1.25W	18	25	24	37	QW		X_4	5.2*7L	10	14	33	8	37	JN18Q.1.25W-XJT	
JN18Q.1.37W	18	37	24	49	QW		X_4	5.2*7L	10	25	33	8	49	JN18Q.1.37W-XJT	
JN18Q.1.50W	18	50	24	62	QW		X_4	5.2*6.2L	10	35	33	8	62	JN18Q.1.50W-XJT	

unit: mm

Note: Q,W Bridge type exterior opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

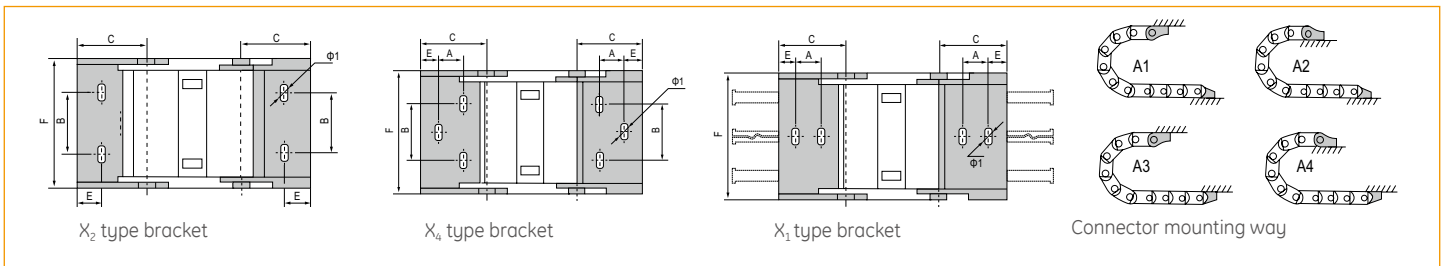

* Optional: Guide supporting solution See P092

Order Example

Sample: inner height 18mm, inner width 18mm, radius 28mm, length 33 links/1 meter

Chain JN18Q.1.18W R28 1000mm /33 Links (Physical length: ± 2mm)

Bracket JN18Q.1.18W-XJT 1 (Set)

Accessories