


◎ Suitable for 19mm or less of cable.

Basic technical data

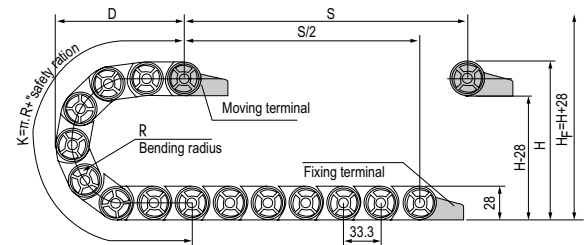

Pitch=33.3mm, link per meter=30, length of chain=S/2+K, S=stroke. K=π.R+ "safety ration"

R	38	48	75	100	125
H	104	124	178	228	278
D	85	95	122	147	172
K	200	233	333	400	466

Actual mounting height: $H_f = H + 28\text{mm}$ (load 2kg/m)

Drawing

- Main body
- Ledge
- Bracket
- Pectinate plate
- JN21Q.2.(Bi)-HGP Horizontal Shim
- J25.1.38S-SZB Pectinate plate
- JN21Q.2-SGP Vertical Shim
- J25.1.57S-SZB Pectinate plate

Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters						Bracket No.		
							Applicable bracket type	Bore diameter $\phi 1$	(mm) hole distance						
JN21Q.2.25N	21	25	28	38.5	Q.N	38,48,75,100,125	X ₂	6.4	A	B	C	D	E	F	JN21Q.2.25N-XJT
JN21Q.2.38N	21	38	28	51.5	Q.N		X ₂	6.4		24	32		11.5	51.5	JN21Q.2.38N-XJTS
JN21Q.2.50N	21	50	28	63.5	Q.N		X ₂	6.4		36	32		11.5	63.5	JN21Q.2.50N-XJT
JN21Q.2.68N	21	68	28	81.5	Q.N		X ₂	6.4		54	32		11.5	81.5	JN21Q.2.68N-XJTS
JN21Q.2.80N	21	80	28	93.5	Q.N		X ₂	6.4		66	32		11.5	93.5	JN21Q.2.80N-XJT
JN21Q.2.100N	21	100	28	113.5	Q.N		X ₂	6.4		86	32		11.5	113.5	JN21Q.2.100N-XJT
JN21Q.2.125N	21	125	28	138.5	Q.N		X ₂	6.4		111	32		11.5	138.5	JN21Q.2.125N-XJT

unit: mm

Note: N indicates that the interior opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

X₂ type bracket

Connector mounting way

Order Example

Sample: inner height 21mm, inner width 38mm, radius 38mm, length 30 links/1 meter

Chain JN21Q.2.38N R38 1000mm /30 Links (Physical length: ± 2mm)

Bracket JN21Q.2.38N-XJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link



* Optional: Guide supporting solution See P092