


◎ Suitable for 22mm or less of cable.


Basic technical data

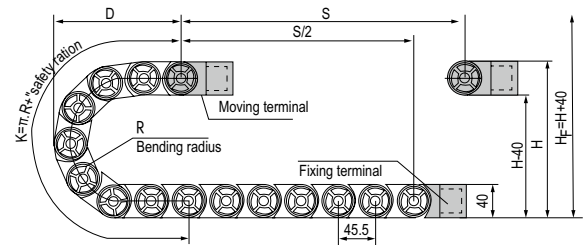

Pitch=45.5mm,link per meter=22,length of chain=S/2+K,S=stroke.K= π .R+ "safety ration"

R	75	100	125	150	175	200	225
H	190	240	290	340	390	440	490
D	141	166	191	216	241	266	291
K	368	414	506	598	644	736	828

Actual mounting height:H_f=H+40mm(load 2kg/m)

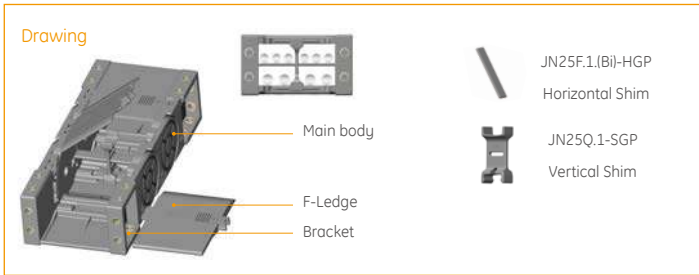


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters										
							Applicable bracket type	Bore diameter φ1	(mm) hole distance						Bracket No.		
									A	B	C	D	E	F			
JN25F.1.38W	25	38	40	58	F.W	75,100,125 150,175,200 225	X ₀₋₁	F-F	6.5*10	24	24	60	9.5	58	JN25F.1.38W-XJT		
JN25F.1.57W	25	57	40	77	F.W		X ₀₋₁	F-F	6.5*10	16	50	65	16	10	62	JN25F.1.38W-FJT	
JN25F.1.77W	25	77	40	97	F.W		X ₀	F-F	4.5	16	69	65	16	10	81	JN25F.1.57W-FJT	
JN25F.1.103W	25	103	40	123	F.W		X ₀	F-F	6.5*10	24	65	60	9.5	97	JN25F.1.77W-XJT		
								X ₀	F-F	4.5	16	89	65	16	10	101	JN25F.1.77W-FJT
								X ₀	F-F	6.5*10	24	84	60	9.5	123	JN25F.1.103W-XJT	
								X ₀	F-F	4.5	16	115	65	16	10	127	JN25F.1.103W-FJT

unit: mm

Note: F.W Enclosed type exterior opening,F-F: enclosed type bracket,Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

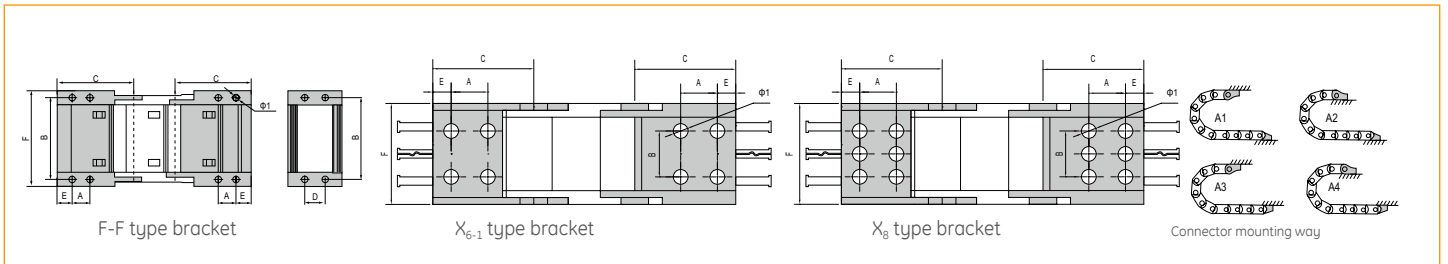

* Optional: Guide supporting solution See P092

Order Example

Sample: inner height 25mm, inner width 25mm, radius 75mm, length 22 links/1 meter chain
 chain JN25F.1.25W R75 1000mm /22 Links (Physical length: ±2mm)
 Bracket JN25F.1.25W-FJT 1 (Set)
 Accessories 1 vertical shim/1 horizontal shim can be mounted in every link