



JN35F.1.W


Series of JN35F.1.W-Enclosed type exterior opening

JFLO[®]



◎ Suitable for 30mm or less of cable.


Basic technical data

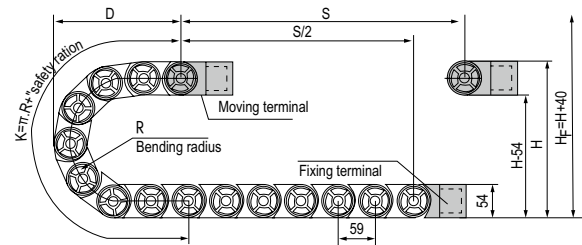

Pitch=59mm,link per meter=17,length of chain=S/2+K,S=stroke.K=π·R+ "safety ration"

	R	100	125	150	175	200	250
H	254	304	354	404	454	504	554
D	186	211	236	261	286	311	336
K	472	531	590	649	708	767	826

Actual mounting height:H_f=H+40mm(load 12kg/m)

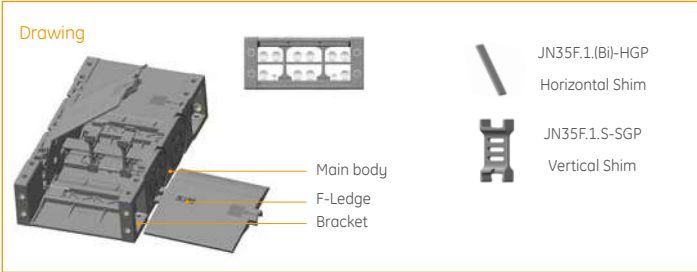


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters									
							Applicable bracket type	Bore diameter Φ1	(mm) hole distance						Bracket No.	
									A	B	C	D	E	F		
JN35F.1.150W	35	50	54	76	F.W	100,125 150,175 200,250	X ₂	6.2*19L	30	59	17	74	JN35F.1.150W-XJT			
							F-F	6.2	22.5	64	83	22	14	79	JN35F.1.150W-FJT	
JN35F.1.175W	35	75	54	101	F.W		X ₃	6.2*19L	55	59	17	99	JN35F.1.175W-XJT			
							F-F	6.2	22.5	89	83	22	14	104	JN35F.1.175W-FJT	
JN35F.1.100W	35	100	54	126	F.W		X ₂	6.2*19L	80	59	17	124	JN35F.1.100W-XJT			
							F-F	6.2	22.5	114	83	22	14	129	JN35F.1.100W-FJT	
JN35F.1.125W	35	125	54	151	F.W		X ₂	6.2*19L	105	59	17	149	JN35F.1.125W-XJT			
							F-F	6.2	22.5	139	83	22	14	154	JN35F.1.125W-FJT	
JN35F.1.150W	35	150	54	176	F.W		X ₂	6.2*19L	130	59	17	174	JN35F.1.150W-XJT			
							F-F	6.2	22.5	164	83	22	14	179	JN35F.1.150W-FJT	
JN35F.1.175W	35	175	54	201	F.W			F-F	6.2	22.5	189	83	22	14	204	JN35F.1.175W-FJT
JN35F.1.200W	35	200	54	226	F.W			F-F	6.2	22.5	214	83	22	14	229	JN35F.1.200W-FJT

unit: mm

Note: F.W Enclosed type exterior opening, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

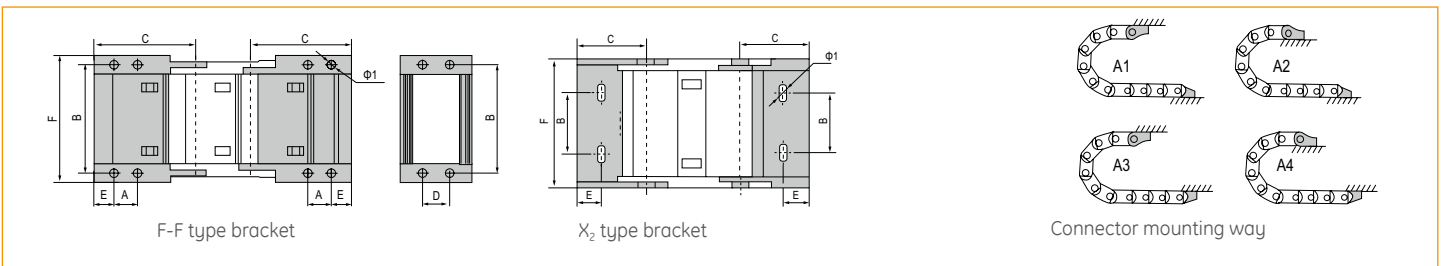

* Optional: Guide supporting solution See P092

Order Example

Sample: inner height 35mm, inner width 50mm, radius 75mm, length 20 links/1 meter

Chain JN35F.1.150W R75 1000mm /20 Links (Physical length: ±2mm)

Bracket JN35F.1.150W-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link