




JN65F.1.W

Series of JN65F.1.W-Enclosed type exterior opening



◎ Suitable for 60mm or less of cable.


Basic technical data

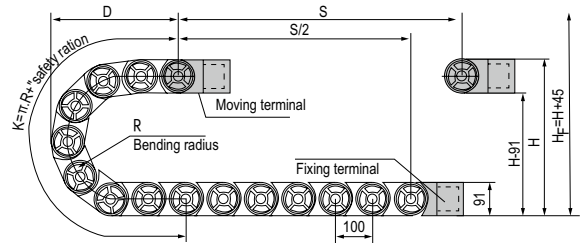

Pitch=100mm, link per meter=10, length of chain=S/2+K, S=stroke. $K = \pi \cdot R + \text{"safety ration"}$

R	150	175	200	250	300	350
H	391	441	491	591	691	791
D	296	321	346	396	446	496
K	700	800	900	1000	1200	1300

Actual mounting height: $H_f = H + 45\text{mm}$ (load 40kg/m)

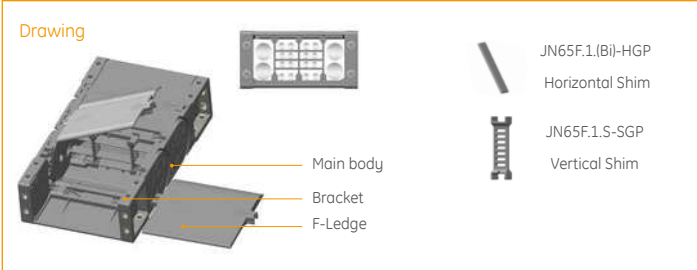


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						Bracket No.
A	B	C	D	E	F										
JN65F.1.100W	65	100	91	140	F.W	150,175,200 250,300,350	F-F	9	35	122	135	45	20	144	JN65F.1.100W-FJT
JN65F.1.125W	65	125	91	165	F.W		F-F	9	35	147	135	45	20	169	JN65F.1.125W-FJT
JN65F.1.150W	65	150	91	190	F.W		F-F	9	35	172	135	45	20	194	JN65F.1.150W-FJT
JN65F.1.175W	65	175	91	215	F.W		F-F	9	35	197	135	45	20	219	JN65F.1.175W-FJT
JN65F.1.200W	65	200	91	240	F.W		F-F	9	35	222	135	45	20	244	JN65F.1.200W-FJT
JN65F.1.250W	65	250	91	290	F.W		F-F	9	35	272	135	45	20	294	JN65F.1.250W-FJT

unit: mm

Note: F.W Enclosed type exterior opening, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

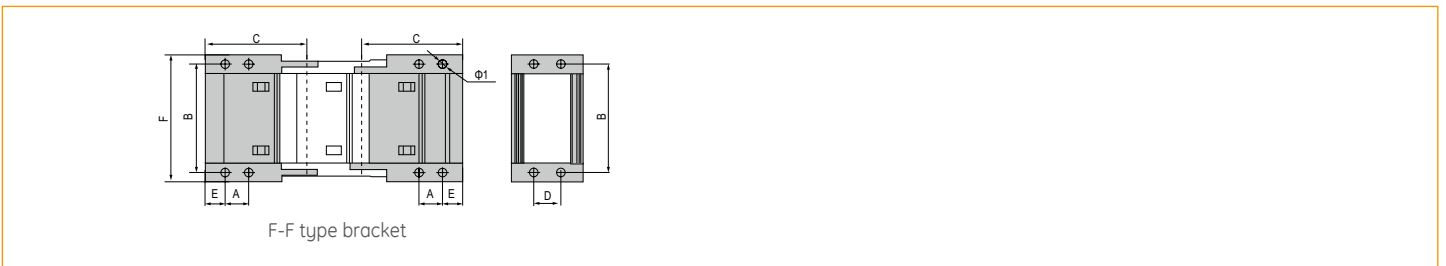

* Optional: Guide supporting solution See P092

Order Example

Sample: inner height 65mm, inner width 100mm, radius 125mm, length 10 links/1 meter

Chain JN65F.1.100W R125 1000mm /10 Links (Physical length: $\pm 2\text{mm}$)

Connector JN65F.1.100W-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link)