


◎ Suitable for 75mm or less of cable.


### Basic technical data

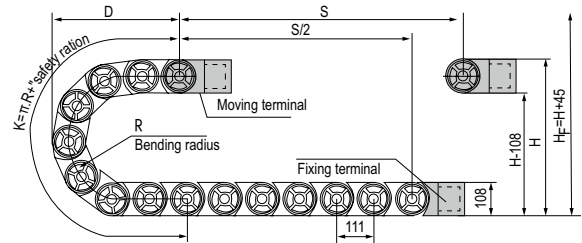

Pitch=111mm,link per meter=9,length of chain=S/2+K,S=stroke.K= π .R+"safety ration"

R	150	200	250	300	350	400	500
H	408	508	608	708	808	908	1108
D	315	365	415	465	515	565	665
K	777	888	1110	1221	1332	1554	1887

Actual mounting height:H<sub>f</sub>=H+45mm(load 70kg/m)

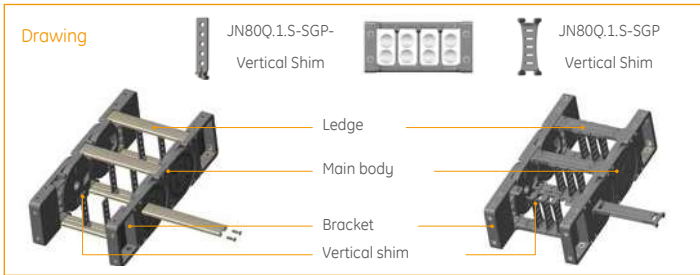

Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter Φ1	(mm) hole distance						Bracket No.
									A	B	C	D	E	F	
JN80Q.1.75S	85	75	108	127	Q,W	150,200,250,300,350,400,500	F-Q	9	35	103	140	66	20	127	JN80Q.1.75S-FJT
JN80Q.1.85S	85	85	108	137	Q,W		F-Q	9	35	113	140	66	20	137	JN80Q.1.85S-FJT
JN80Q.1.100S	85	100	108	152	Q,W		F-Q	9	35	128	140	66	20	152	JN80Q.1.100S-FJT
JN80Q.1.125S	85	125	108	177	Q,W		F-Q	9	35	153	140	66	20	177	JN80Q.1.125S-FJT
JN80Q.1.150S	85	150	108	202	Q,W		F-Q	9	35	178	140	66	20	202	JN80Q.1.150S-FJT
JN80Q.1.200S	85	200	108	252	Q,W		F-Q	9	35	228	140	66	20	252	JN80Q.1.200S-FJT
JN80Q.1.250S	85	250	108	302	Q,W		F-Q	9	35	278	140	66	20	302	JN80Q.1.250S-FJT
JN80Q.1.300S	85	300	108	352	Q,W		F-Q	9	35	328	140	66	20	352	JN80Q.1.300S-FJT
JN80Q.1.350S	85	350	108	402	Q,W		F-Q	9	35	378	140	66	20	402	JN80Q.1.350S-FJT
JN80Q.1.400S	85	400	108	452	Q,W		F-Q	9	35	428	140	66	20	452	JN80Q.1.400S-FJT
JN80Q.1.500S	85	500	108	552	Q,W		F-Q	9	35	528	140	66	20	552	JN80Q.1.500S-FJT
JN80Q.1.600S	85	600	108	652	Q,W		F-Q	9	35	628	140	66	20	652	JN80Q.1.600S-FJT

unit: mm

Note: Q,S Bridge type exterior opening,F-Q: bridge type square bracket,Different serial number indicates the difference rank type of fixing holes

### Fix bracket type and parameters (See table)



F-Q type bracket



\* Optional: Guide supporting solution See P092

### Order Example

Sample: inner height 85mm, inner width 75mm, radius 150mm, length 9 links/1 meter

Chain JN80Q.1.75S R150 1000mm /9 Links (Physical length: ± 2mm)

Connector JN80Q.1.75S-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link