


◎ Suitable for 16mm or less of cable.


Basic technical data

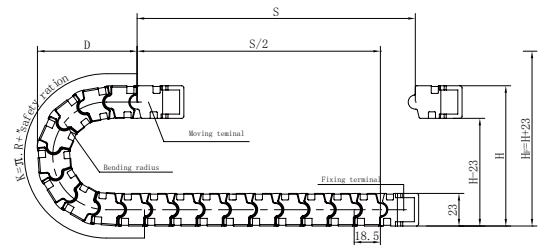

Pitch=18.5mm, link per meter=54, length of chain=S/2+K, S=stroke. K= π .R+ "safety ration"

R	38	48	60	75
H	99	119	143	173
D	68	78	90	105
K	167	204	241	278

Actual mounting height: $H_f = H + 23\text{mm}$

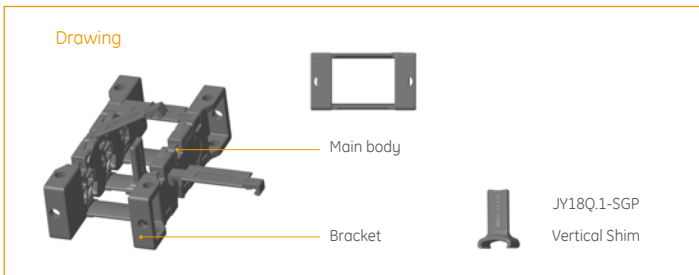


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						Bracket No.
									A	B	C	D	E	F	
JY18Q.1.25W	18	25	23	37	Q.W	38,48,60,75	F-Q	4.2	35	33	9	42	JY18Q.1.25W-FJT		
							X ₄	5.2*7.2L	10	16	33	7	37	JY18Q.1.25W-XJT	
JY18Q.1.37W	18	37	23	49	Q.W		F-Q	4.2	47	33	9	54	JY18Q.1.37W-FJT		
JY18Q.1.50W	18	50	23	62	Q.W		F-Q	4.2	60	33	9	67	JY18Q.1.50W-FJT		

(unit: mm)

Note: Q.W Bridge type exterior opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

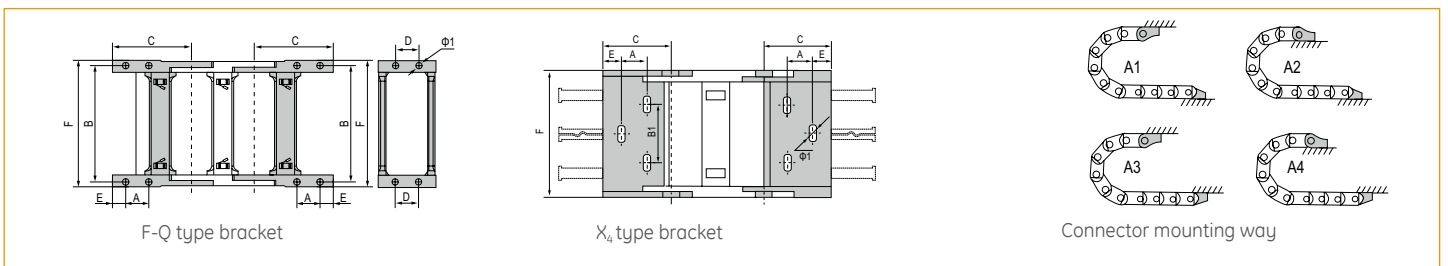

Order Example

Sample: inner height 18mm, inner width 25mm, radius 38mm, length 54 links/1meter

Chain JY18Q.1.25W R18 1m /54 Links (Physical length: ± 2mm)

Bracket JY18Q.1.25W-FJT 1 (Set)

Accessories