




# JY21Q.1.W

Series of JY21Q.1.W-Bridge type exterior opening



◎ Suitable for 16mm or less of cable.

## Basic technical data

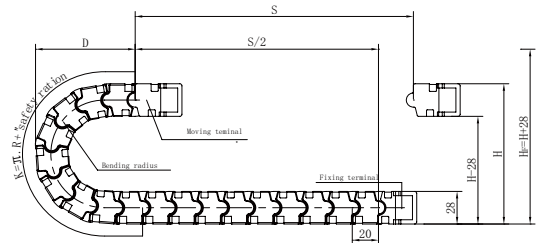

Pitch=20mm, link per meter=50, length of chain= $S/2+K$ ,  $S$ =stroke.  $K=\pi \cdot R$ + "safety ration"

R	38	48	55	75	100
H	104	124	138	178	228
D	72	82	89	109	134
K	160	200	220	280	360

Actual mounting height:  $H_f=H+28$ mm

**Drawing**


- JY25Q.1-SZB(2) Pectinate plate
- JY25Q.1-SZB(3) Pectinate plate
- JY21Q.1-SGP Vertical Shim
- Main body
- Bracket

Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						Bracket No.
									A	B	C	D	E	F	
JY21Q.1.25W	21	25	28	39.4	Q.W	38,48,55,75,100	F-Q	4.2	35	27	8.5	42	JY21Q.1.25W-FJT		
JY21Q.1.38W	21	38	28	52.4	Q.W		F-Q	4.2	48	27	8.5	55	JY21Q.1.38W-FJT		
JY21Q.1.57W	21	57	28	71.4	Q.W		F-Q	4.2	67	27	8.5	74	JY21Q.1.57W-FJT		
JY21Q.1.77W	21	77	28	91.4	Q.W		F-Q	4.2	87	27	8.5	94	JY21Q.1.77W-FJT		

(unit: mm)

Note: Q,W Bridge type exterior opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

## Fix bracket type and parameters (See table)

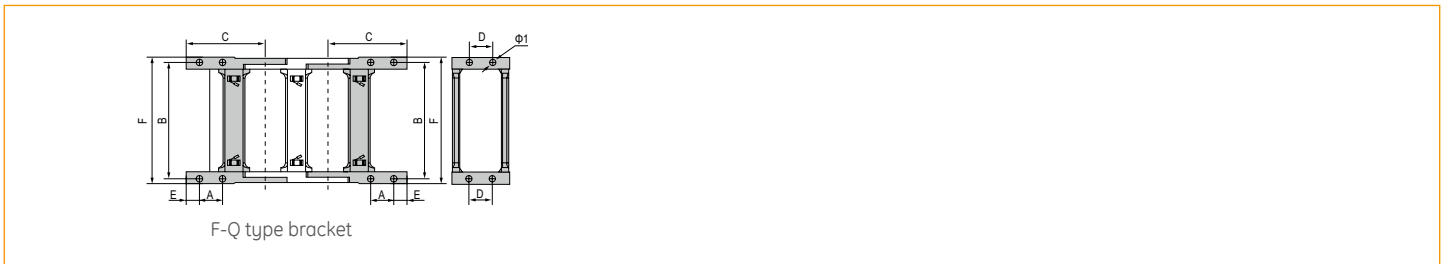

## Order Example

Sample: inner height 21mm, inner width 25mm, radius 38mm, length 50 links/1meter

JY21Q.1.25W R38 1m /50 Links (Physical length:  $\pm 2$ mm)

Bracket JY21Q.1.25W-FJT 1 (Set)

Accessories