


◎ Suitable for 22mm or less of cable.


#### Basic technical data

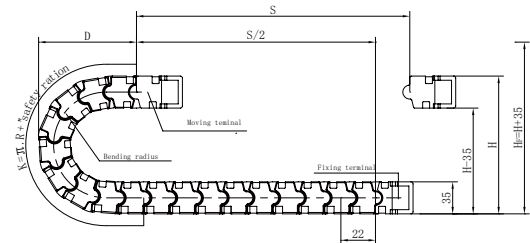

Pitch=22mm, link per meter=45, length of chain= $S/2+K$ , stroke. $K= \pi \cdot R +$ "safety ration"

R	55	75	100	125	150
H	145	185	235	285	335
D	95	115	140	165	190
K	220	286	374	440	528

Actual mounting height: $H_f=H+35$ mm

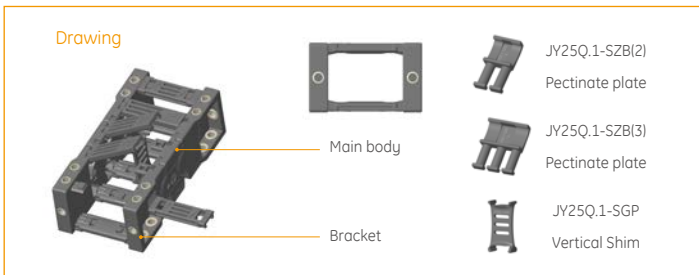

Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters							
							Applicable bracket type	Bore diameter $\phi 1$	(mm) hole distance					Bracket No.
									A	B	C	D	E	
JY25Q.1.25W	25	25	35	41	Q,W	55,75,100, 125,150	F-Q	4.2	35	48	10	44.5	JY25Q.1.25W-FJT	
JY25Q.1.38W	25	38	35	54	Q,W		F-Q	4.2	48	48	10	57.5	JY25Q.1.38W-FJT	
JY25Q.1.50W	25	50	35	66	Q,W		F-Q	4.2	60	48	10	69.5	JY25Q.1.50W-FJT	
JY25Q.1.57W	25	57	35	73	Q,W		F-Q	4.2	67	48	10	76.5	JY25Q.1.57W-FJT	
JY25Q.1.75W	25	75	35	91	Q,W		F-Q	4.2	85	48	10	94.5	JY25Q.1.75W-FJT	
JY25Q.1.77W	25	77	35	93	Q,W		F-Q	4.2	87	48	10	96.5	JY25Q.1.77W-FJT	
JY25Q.1.100W	25	100	35	116	Q,W		F-Q	4.2	110	48	10	119.5	JY25Q.1.100W-FJT	
JY25Q.1.103W	25	103	35	119	Q,W		F-Q	4.2	113	48	10	122.5	JY25Q.1.103W-FJT	
JY25Q.1.125W	25	125	35	141	Q,W		F-Q	4.2	135	48	10	134.5	JY25Q.1.125W-FJT	

(unit: mm)

Note: Q,W Bridge type exterior opening,X: oblique bracket,Different serial number indicates the difference rank type of fixing holes

#### Fix bracket type and parameters (See table)



#### Order Example

Sample: inner height 25mm, inner width 25mm, radius 55mm, length 45 links/1meter

Chain JY25Q.1.25W R55 1m/45 Links (Physical length:  $\pm 2$ mm)

Bracket JY25Q.1.25W-FJT 1 (Set)

Accessories