


◎ Suitable for 40mm or less of cable.


Basic technical data

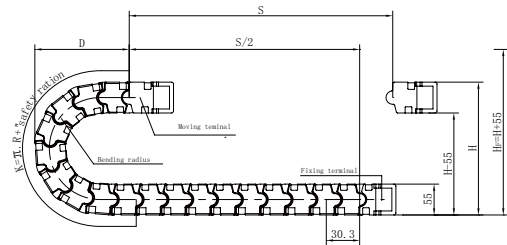

Pitch=30.3mm, link per meter=33, length of chain=S/2+K, S=stroke. K=π·R+ "safety ration"

	R	55	75	100	125	150	200
H	165	205	255	305	355	455	
D	113	133	158	183	208	258	
K	242	303	394	455	545	697	

Actual mounting height: $H_f = H + 55\text{mm}$

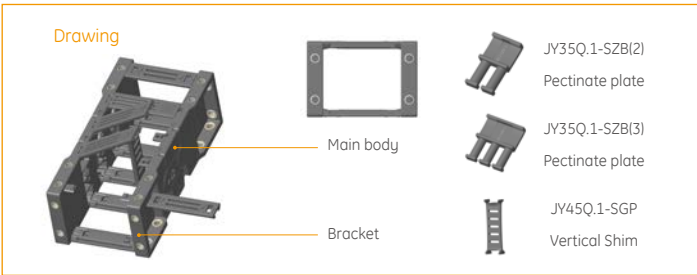


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\phi 1$	(mm) hole distance						Bracket No.
									A	B	C	D	E	F	
JY45Q.1.25W	45	25	55	49	Q,W	55,75,100, 125,150,200	F-Q	5.5	37	70	12.5	49	JY45Q.1.25W-FJT		
JY45Q.1.38W	45	38	55	62	Q,W		F-Q	5.5	50	70	12.5	62	JY45Q.1.38W-FJT		
JY45Q.1.50W	45	50	55	74	Q,W		F-Q	5.5	62	70	12.5	74	JY45Q.1.50W-FJT		
JY45Q.1.57W	45	57	55	81	Q,W		F-Q	5.5	69	70	12.5	81	JY45Q.1.57W-FJT		
JY45Q.1.75W	45	75	55	99	Q,W		F-Q	5.5	87	70	12.5	99	JY45Q.1.75W-FJT		
JY45Q.1.77W	45	77	55	101	Q,W		F-Q	5.5	89	70	12.5	101	JY45Q.1.77W-FJT		
JY45Q.1.100W	45	100	55	124	Q,W		F-Q	5.5	112	70	12.5	124	JY45Q.1.100W-FJT		
JY45Q.1.103W	45	103	55	127	Q,W		F-Q	5.5	115	70	12.5	127	JY45Q.1.103W-FJT		
JY45Q.1.125W	45	125	55	149	Q,W		F-Q	5.5	137	70	12.5	149	JY45Q.1.125W-FJT		

(unit: mm)

Note: Q,W Bridge type exterior opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

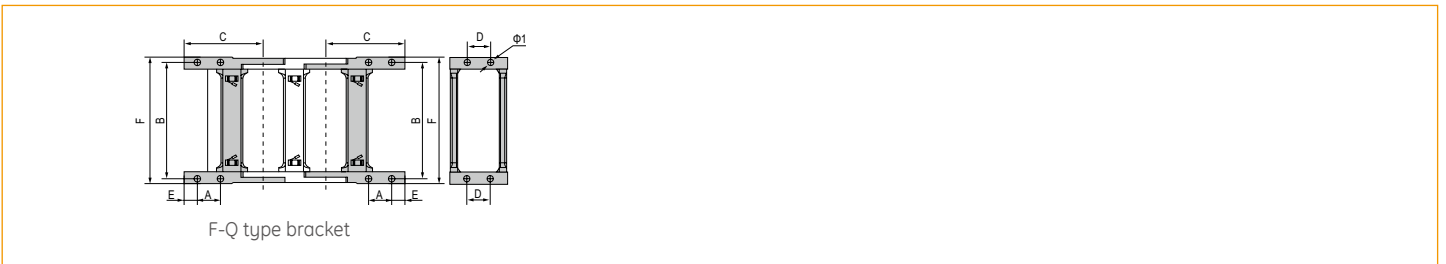

Order Example

Sample: inner height 45mm, inner width 25mm, radius 55mm, length 33 links/1meter

Chain JY45Q.1.25W R55 1m /33 Links (Physical length: ± 2mm)

Bracket JY45Q.1.25W-FJT 1 (Set)

Accessories