




JEZ80Q.2.S

Series of JEZ80Q.2.S-Bridge type open of both side

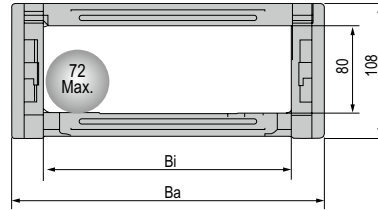

⊗ Suitable for 72mm or less of cable.


Basic technical data

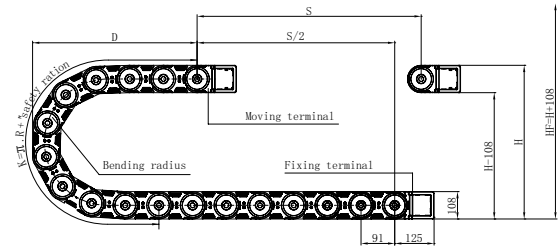

Pitch=91mm, link per meter=11, length of chain=S/2+K, S=stroke. K=π.R+ "safety ration"

R	150	200	250	300	350	400	500	600
H	408	508	608	708	808	908	1108	1308
D	295	345	395	445	495	545	645	745
K	728	819	1001	1183	1365	1456	1820	2093

Actual mounting height: $H_f = H + 108\text{mm}$ (load 3kg/m)


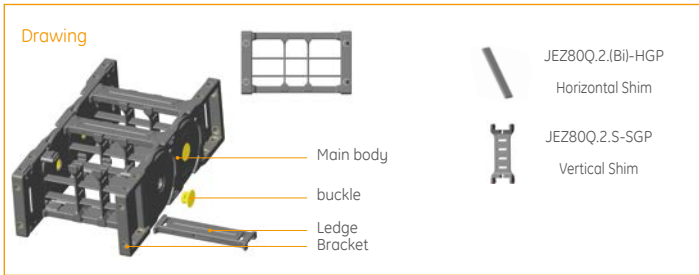


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters						Bracket No.		
							Applicable bracket type	Bore diameter $\Phi 1$	(mm) hole distance						
									A	B	C	D		E	F
JEZ80Q.2.75S	80	75	108	106	Q.S	150.200.250. 300.350.400. 500.600	F-Q	9	35	95	125	66	20	112	JEZ80Q.2.75S-FJT
JEZ80Q.2.85S	80	85	108	116	Q.S		F-Q	9	35	105	125	66	20	122	JEZ80Q.2.85S-FJT
JEZ80Q.2.100S	80	100	108	131	Q.S		F-Q	9	35	120	125	66	20	137	JEZ80Q.2.100S-FJT
JEZ80Q.2.125S	80	125	108	156	Q.S		F-Q	9	35	145	125	66	20	162	JEZ80Q.2.125S-FJT
JEZ80Q.2.150S	80	150	108	181	Q.S		F-Q	9	35	170	125	66	20	187	JEZ80Q.2.150S-FJT
JEZ80Q.2.175S	80	175	108	206	Q.S		F-Q	9	35	195	125	66	20	212	JEZ80Q.2.175S-FJT
JEZ80Q.2.200S	80	200	108	231	Q.S		F-Q	9	35	220	125	66	20	237	JEZ80Q.2.200S-FJT
JEZ80Q.2.250S	80	250	108	281	Q.S		F-Q	9	35	270	125	66	20	287	JEZ80Q.2.250S-FJT
JEZ80Q.2.300S	80	300	108	331	Q.S		F-Q	9	35	320	125	66	20	337	JEZ80Q.2.300S-FJT
JEZ80Q.2.350S	80	350	108	381	Q.S		F-Q	9	35	370	125	66	20	387	JEZ80Q.2.350S-FJT
JEZ80Q.2.400S	80	400	108	431	Q.S		F-Q	9	35	420	125	66	20	437	JEZ80Q.2.400S-FJT

(unit): mm

Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

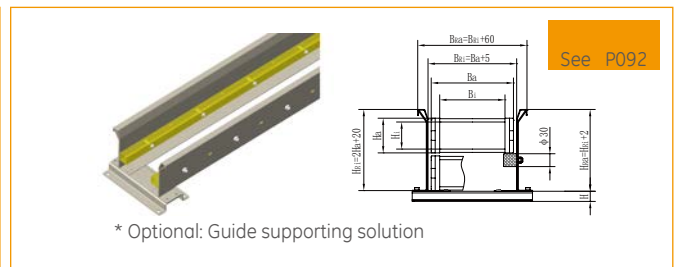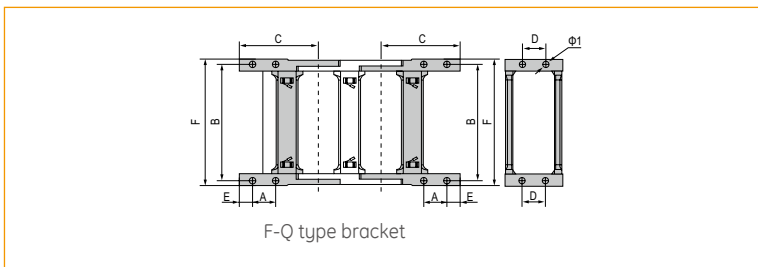

* Optional: Guide supporting solution

Order Example

Sample: inner height 80mm, inner width 75mm, radius 150mm, length 11 links/1 meter
 Chain JEZ80Q.2.75S R150 1000mm /11 Links (Physical length: ± 2mm)
 Bracket JEZ80Q.2.75S-FJT 1 (Set)
 Accessories 1 vertical shim/1 horizontal shim can be mounted in every link