



# J15BF.1.N


Series of J15BF.1.N Semi-enclosed type interior opening

**JFLO**<sup>®</sup>



⊗ Suitable for 12mm or less of cable.

## Basic technical data

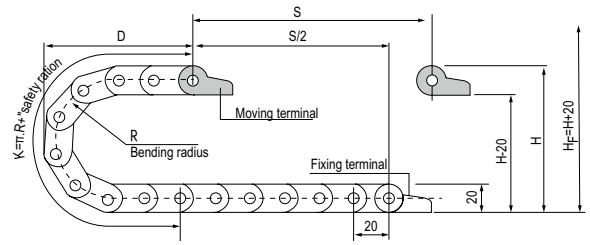


Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke.  $K = \pi \cdot R + \text{"safety ration"}$

R	28	38	48
H	76	96	116
D	58	68	78
K	140	160	200

Actual mounting height:  $H_f = H + 20\text{mm}$  (load 0.3kg/m)

## Drawing

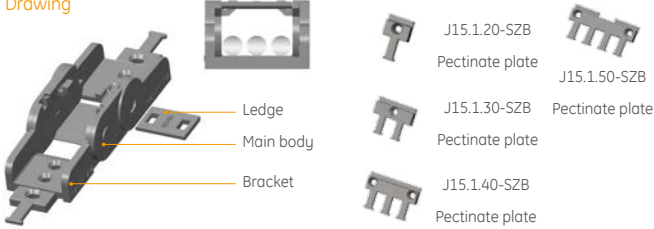


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter $\Phi 1$	mm hole distance						Bracket No.
									A	B	C	D	E	F	
J15BF.1.15N	15	15	20	23	BF.N	28	X <sub>1</sub>	4.2*7L	10		33	6	23	J15BF.1.15N-XJT	
J15BF.1.20N	15	20	20	29	BF.N	28,38	X <sub>1</sub>	3.2	8		30	7	29	J15BF.1.20N-XJT	
J15BF.1.30N	15	30	20	39	BF.N	28,38,48	X <sub>2</sub>	4.2*7L		15	30	8	39	J15BF.1.30N-XJT	
J15BF.1.40N	15	40	20	49	BF.N	28,38,48	X <sub>3</sub>	4.2*7L	7	28	30	7	49	J15BF.1.40N-XJT	
J15BF.1.50N	15	50	20	59	BF.N	28,38,48	X <sub>3</sub>	4.2*7L	7	37	30	7	59	J15BF.1.50N-XJT	


unit: mm

Note: N indicates that the interior opening


## Fix bracket type and parameters ( See table)



X<sub>1</sub> type bracket

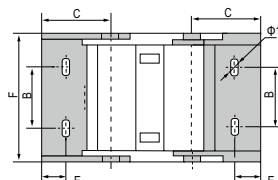

X<sub>2</sub> type bracket

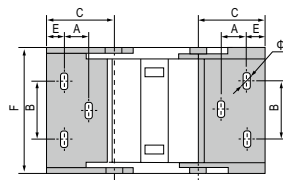

X<sub>3</sub> type bracket

## Order Example

Sample: inner height 15mm, inner width 15mm, radius 28mm, length 50 links/1 meter

Chain J15BF.1.15N R28 1000mm /50 Links

Bracket J15BF.1.15N-XJT 1 Set

Accessories

Note: Various sizes can be customized according to customer requirements.