


◎ Suitable for 17mm or less of cable.


Basic technical data

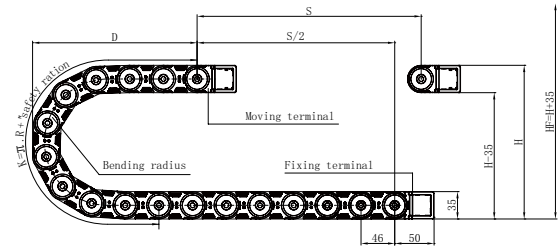

Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+ "safety ration"

| | | | |
|---|-----|-----|-----|
| R | 75 | 100 | 125 |
| H | 185 | 235 | 285 |
| D | 139 | 164 | 189 |
| K | 368 | 414 | 506 |

Actual mounting height: $H_f = H + 35\text{mm}$ (load 2kg/m)


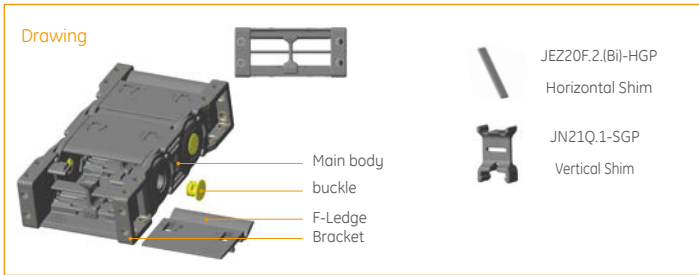


| Cable Chain No. | Hi | Bi | Ha | Ba | Styles | Bending radius R | Bracket type and parameters | | | | | | Bracket No. | | |
|-----------------|----|-----|----|-----|--------|------------------|-----------------------------|------------------------|--------------------|-----|----|----|-------------|-------|-------------------|
| | | | | | | | Applicable bracket type | Bore diameter $\Phi 1$ | (mm) hole distance | | | | | | |
| | | | | | | | | | A | B | C | D | | | E |
| JEZ20F.2.38S | 20 | 38 | 35 | 55 | F.S | 75, 100, 125 | F-F | 4.5 | 15 | 51 | 50 | 15 | 8.5 | 60.5 | JEZ20F.2.38S-FJT |
| JEZ20F.2.50S | 20 | 50 | 35 | 67 | F.S | | F-F | 4.5 | 15 | 63 | 50 | 15 | 8.5 | 72.5 | JEZ20F.2.50S-FJT |
| JEZ20F.2.57S | 20 | 57 | 35 | 74 | F.S | | F-F | 4.5 | 15 | 70 | 50 | 15 | 8.5 | 79.5 | JEZ20F.2.57S-FJT |
| JEZ20F.2.60S | 20 | 60 | 35 | 77 | F.S | | F-F | 4.5 | 15 | 73 | 50 | 15 | 8.5 | 82.5 | JEZ20F.2.60S-FJT |
| JEZ20F.2.75S | 20 | 75 | 35 | 92 | F.S | | F-F | 4.5 | 15 | 88 | 50 | 15 | 8.5 | 97.5 | JEZ20F.2.75S-FJT |
| JEZ20F.2.100S | 20 | 100 | 35 | 117 | F.S | | F-F | 4.5 | 15 | 113 | 50 | 15 | 8.5 | 122.5 | JEZ20F.2.100S-FJT |

(unit): mm

Note: F.S Enclosed open of both side, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)

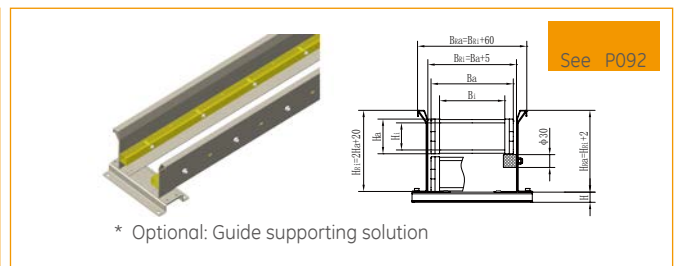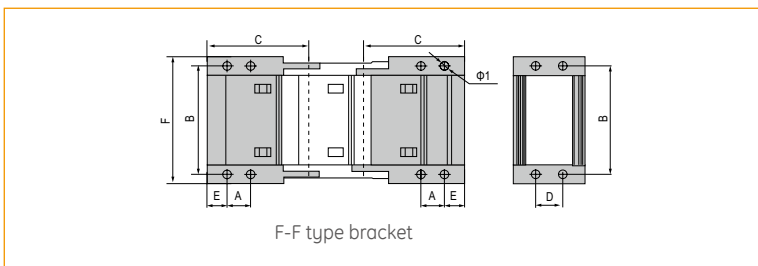

Order Example

Sample: inner height 20mm, inner width 38mm, radius 75mm, length 22 links/1 meter

Chain JEZ20F.2.38S R75 1000mm /22 Links (Physical length: $\pm 2\text{mm}$)

Bracket JEZ20F.2.38S-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link