




# JEZ55Q.2.S

Series of JEZ55Q.2.S-Bridge type open of both side

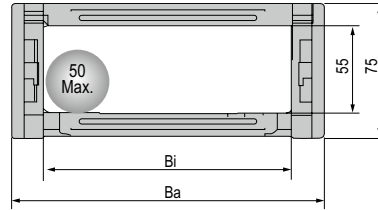

⊗ Suitable for 50mm or less of cable.


## Basic technical data

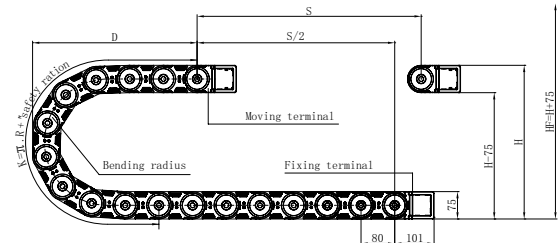

Pitch=80mm,link per meter=13,length of chain=S/2+K,S=stroke.K=π.R+ "safety ration"

R	75	100	125	150	200	250	300
H	225	275	325	375	475	575	675
D	193	218	243	268	318	368	418
K	400	480	560	640	800	960	1120

Actual mounting height:  $H_f = H + 75\text{mm}$  (load 3kg/m)


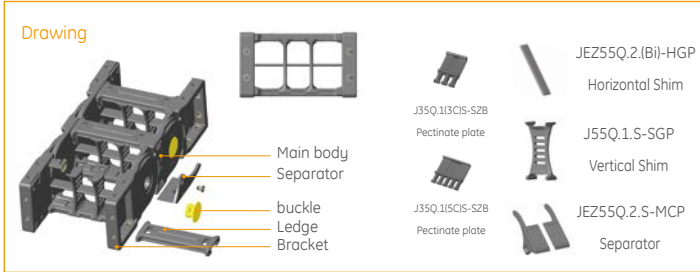


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters							Bracket No.	
							Applicable bracket type	Bore diameter $\phi 1$	(mm) hole distance						
									A	B	C	D	E		
JEZ55Q.2.50S	55	50	75	79.6	Q.S	75,100,125,150,200,250,300	F-Q	6	30	68.5	101	30	17	84	JEZ55Q.2.50S-FJT
JEZ55Q.2.60S	55	60	75	89.6	Q.S		F-Q	6	30	78.5	101	30	17	94	JEZ55Q.2.60S-FJT
JEZ55Q.2.75S	55	75	75	104.6	Q.S		F-Q	6	30	93.5	101	30	17	109	JEZ55Q.2.75S-FJT
JEZ55Q.2.90S	55	90	75	119.6	Q.S		F-Q	6	30	108.5	101	30	17	124	JEZ55Q.2.90S-FJT
JEZ55Q.2.100S	55	100	75	129.6	Q.S		F-Q	6	30	118.5	101	30	17	134	JEZ55Q.2.100S-FJT
JEZ55Q.2.117S	55	117	75	146.6	Q.S		F-Q	6	30	135.5	101	30	17	151	JEZ55Q.2.117S-FJT
JEZ55Q.2.125S	55	125	75	154.6	Q.S		F-Q	6	30	143.5	101	30	17	159	JEZ55Q.2.125S-FJT
JEZ55Q.2.130S	55	130	75	159.6	Q.S		F-Q	6	30	148.5	101	30	17	164	JEZ55Q.2.130S-FJT
JEZ55Q.2.150S	55	150	75	179.6	Q.S		F-Q	6	30	168.5	101	30	17	184	JEZ55Q.2.150S-FJT
JEZ55Q.2.154S	55	154	75	183.6	Q.S		F-Q	6	30	172.5	101	30	17	188	JEZ55Q.2.154S-FJT
JEZ55Q.2.175S	55	175	75	204.6	Q.S		F-Q	6	30	193.5	101	30	17	209	JEZ55Q.2.175S-FJT
JEZ55Q.2.200S	55	200	75	229.6	Q.S		F-Q	6	30	218.5	101	30	17	234	JEZ55Q.2.200S-FJT
JEZ55Q.2.250S	55	250	75	279.6	Q.S		F-Q	6	30	268.5	101	30	17	284	JEZ55Q.2.250S-FJT
JEZ55Q.2.300S	55	300	75	329.6	Q.S		F-Q	6	30	318.5	101	30	17	334	JEZ55Q.2.300S-FJT

(unit): mm

Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

## Fix bracket type and parameters (See table)

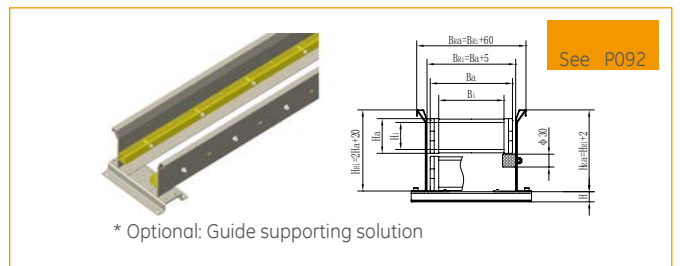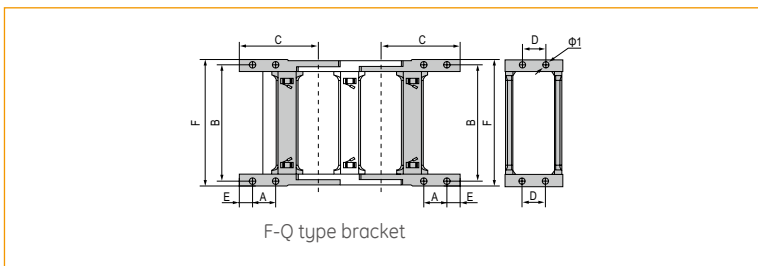

## Order Example

Sample: inner height 55mm, inner width 50mm, radius 75mm, length 13 links/1 meter

Chain JEZ55Q.2.50S R75 1000mm /13 Links (Physical length: ± 2mm)

Bracket JEZ55Q.2.50S-FJT 1 (Set)

Accessories 1 vertical shim/1 horizontal shim can be mounted in every link