



# JN10Q.1.W


Series of JN10Q.1.W-Bridge type exterior opening

**JFLO**<sup>®</sup>



◎ Suitable for 9mm or less of cable.


## Basic technical data

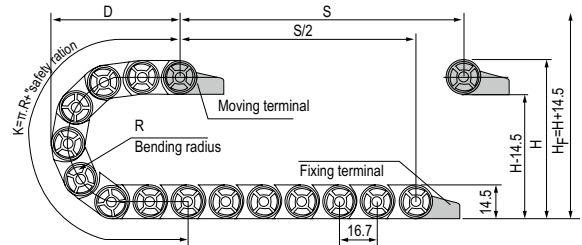

Pitch=16.7mm,link per meter=60,length of chain=S/2+K,S=stroke.K= π .R+"safety ration"

R	18	28	38	48
H	50.5	70.5	90.5	110.5
D	43	53	63	73
K	90	120	150	180

Actual mounting height:H<sub>f</sub>=H+14.5mm(load 0.2kg/m)

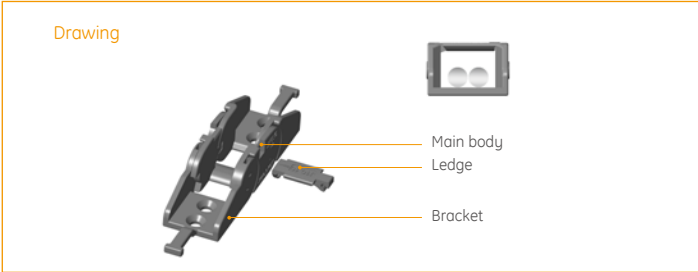


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters								
							Applicable bracket type	Bore diameter Φ1	(mm) hole distance						Bracket No.
									A	B	C	D	E	F	
JN10Q.1.10W	10	10	14.5	17.5	Q.W	18,28,38,48	X <sub>1</sub>	3.2	8	22	4	17.5	JN10Q.1.10W-XJTS*		
JN10Q.1.15W	10	15	14.5	22.5	Q.W		X <sub>1</sub>	3.2	8	22	4	22.5	JN10Q.1.15W-XJTS*		
JN10Q.1.20W	10	20	14.5	27.5	Q.W		X <sub>1</sub>	3.2	8	22	4	27.5	JN10Q.1.20W-XJTS*		
JN10Q.1.30W	10	30	14.5	37.5	Q.W		X <sub>3</sub>	3.2	8	22	22	4	37.5	JN10Q.1.30W-XJTS*	

unit: mm

Note: Q.W Bridge type exterior opening,X: oblique bracket,Different serial number indicates the difference rank type of fixing holes

## Fix bracket type and parameters (See table)

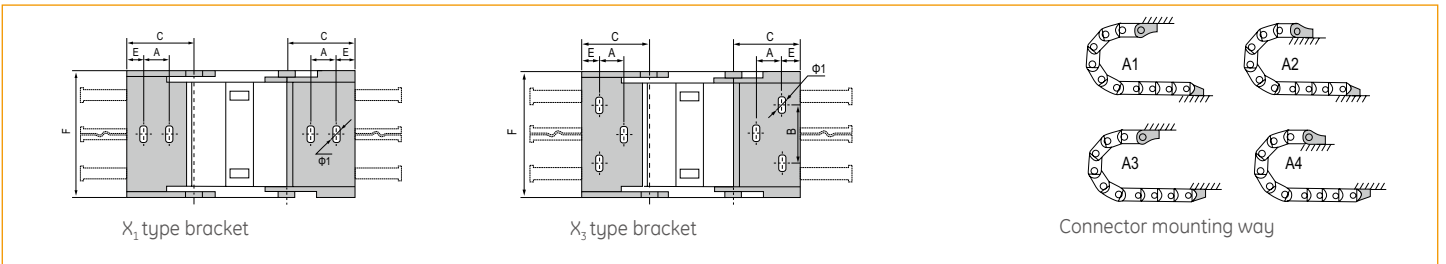

\* Optional: Bracket without Pectinate plate Example: JN10Q.1.10W-XJT

## \* Order Example

Sample: inner height 10mm, inner width 10mm, radius 18mm, length 30 links/0.5 meter

Chain JN10Q.1.10WR18 500mm /30 Links (Physical length: ± 2mm)

Bracket JN10Q.1.10W-XJTS\* 1 (Set)

Accessories